

Product catalogue

TABLE OF CONTENTS

ABOUT THE COMPANY	2
FLOOR DRAINS	12
LINEAR DRAINAGE	61
BATHROOM SOLUTIONS	73
MANHOLE COVERS	79
PROTECTIVE ELEMENTS	89
PLATFORMS AND STRUCTURES	94
FOOD INDUSTRY FACILITIES EQUIPMENT	102

ABOUT THE COMPANY



ATT is a manufacturing and trading company offering stainless steel elements. We employ highly qualified personnel and operate a technologically advanced machine park. This allows us to comprehensively implement entrusted tasks – from technical consultancy in the design phase and through the production process to assembly.

ATT is a team of engineers with extensive knowledge and passion combined with imagination and long-term experience. This combination of elements is reflected in the projects we develop and implement. Our comprehensive technical know-how corresponding to the realities in the construction industry and industrial facilities, means we can optimally tailor solutions to meet the needs of individual customers.

The commercial division is made up of sales engineers who participate in the entire process.

They are present at each phase of implementation of an order: during preparation of projects, production, assembly and installation works, acting as technical advisers.

The scope of ATT's operations is not limited to Poland or European countries. Our goods and services are used by companies from the United States, the United Arab Emirates, South Korea and Australia, to name a few.

We prepare elements of equipment and installation systems for facilities of the food, gastronomic, chemical and pharmaceutical industries.

The majority of our products can be found on our website at www.att.eu, available in several language versions.

CERTIFICATES

ATT INOX DRAIN[®], a company with Polish capital, was established nearly twenty years ago. Since the beginning of its activity, stainless steel drainage systems have been the key products of the company. In addition to the catalogue products, we also develop individual designs adapted to requirements resulting from the needs of a project. This is achieved thanks to our gualified personnel and technologically advanced machine park. Importantly, ATT drainage systems meet the highest requirements of the European Hygiene Standards PN-EN 1253 (point drainage) and PN-EN 1433 (linear drainage)

However, ATT offers more than just drainage systems. In response to the demands of the market and in order to fully implement its production potential, the company has launched production of equipment elements and stainless steel structures for industries where the highest phytosanitary requirements must be met. The hygienic safety of all products manufactured by ATT is assured by fulfilling the guidelines of the Polish Hygiene Institute (certificate no. HK/B/0266/01/2015).

Moreover, to ensure that our products meet the strictest hygiene requirements, in the design phase we follow this guidelines included in the listed standards: PN-EN 1672-2+A1:2009 - hygiene requirements, and



PN-EN ISO 14159:2008 - hygiene requirements related to the designing of machines.

ATT is also a member of the European Hygienic

Engineering and Design Group, an organisation that constitutes a communication platform for global food corporations, manufacturers of



machines and devices, as well as members of research

institutes and public health protection institutions. EHEDG members cooperate in order to promote and improve hygiene in food production plants. As a result, ATT's products are designed and manufactured in accordance with the most recent guidelines on hygiene requirements.



Our products are CE marked.

On 1 July 2014, the transition period for marking in the nationwide system came to an end.

After this date, structural elements made of steel or aluminium must be CE marked to be elegible for marketing. This means that ATT meets the requirements of the following standards :



PN-EN 1090-1:2012 part 1: Rules of compliance assessment for constructional components; and PN-EN 1090-2:2012 part 2: Technical requirements for steel structures.

Another step enabling monitoring of the production process in ATT is the implementation of standards that guaranteed supervision of the welding process, i.e. standards of PN-EN ISO 3834:2007 series. They include guality requirements related to welding of metal materials.

We have carried out implementation of PN - EN 1090 and PN EN ISO 3834 in cooperation with TÜV Rheinland



HYGIENE

PLATE GRATING SHEET METAL GRATING MESH GRATING



```
TRAP
```



Covered load-bearing flat bars to prevent accumulation of contamination on sharp edges.



Blunted edges to minimise the risk of accumulation of solid waste, on which bacteria may grow.

Pressed, with no

connected elements,

to facilitate cleaning

and removal of solid

contamination.



Inverted shape ensures maximum protection against unpleasant odours and bacterial penetration.



Pressed upper part withno sharp corners facilitates removal of contamination and prevents growth of bacteria.




Butt welding allows maintaining the highest hygenic standards.



Butt welding of all elements. No welding joints in corners.

Pressed body, with no sharp edges or welded corner joints prevents the accumulation of contamination.

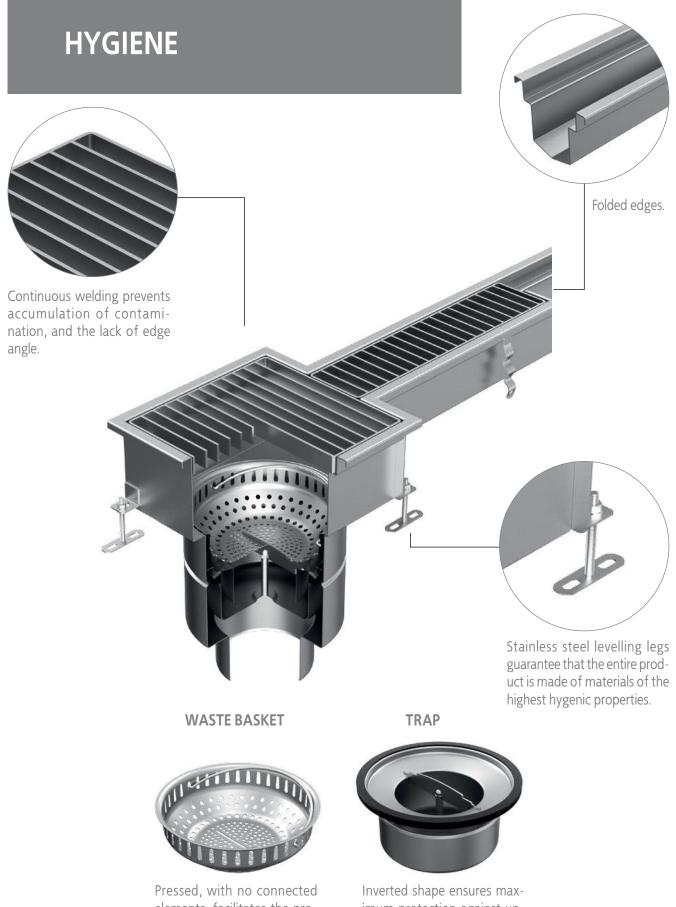

elements, facilitates the process of cleaning and removal of solid contamination.

imum protection against unpleasant odours and bacterial penetration.





industrial, external drainage systems and drainage systems for buildings,



manhole covers, access covers and media boxes,



protective elements (bollards, barriers, kerbs, stainless steel tiles),



platforms, construction elements and technological installation,



equipment for food, pharmaceutical and chemical industries facilities,



design and installation services.



STAINLESS STEEL



STEEL PROPERTIES

The term "stainless steel" refers to grades of raw materials with increased resistance to corrosion when compared to normal alloy steels.

Stainless steels are iron alloys that contain a minimum of 11% chrome. They owe their high anti-corrosion properties to the production of a top layer of chromium oxides.

This layer is characterised by high durability. Even in cases mechanical or chemical damage to the steel surface, the anti-corrosive properties of the material are maintained.

STAINLESS STEEL TYPES

austenitic – it features very good anti-corrosion properties and is used in the food, chemical, and pharmaceutical industries – carbon content 0.02%.

martensitic – it features the highest mechanical durability among all groups of steel and magnetic properties; it is subject to heat treatment and is characterised by a high carbon content of approximately 0.3%.

austenitic-ferritic – melted in a duplex process, it features good anti-corrosion properties and high resistance to cracking. It is a magnetic steel, unsuitable for installation elements.

STAINLESS STEEL



PRODUCTION MATERIAL

The following steels are the basic production materials: AISI 304, EN 1.4301 and ASI 316L, EN 1.4404. In case of necessity to produce elements using steels of other grades, the company manufactures these elements upon the Client's request. In case of decorative products (interior design), there is a possibility to order elements made of ground sheets or perform grinding after treatment.



STAINLESS STEEL

The following information was compiled based on our know-how and long-term experience in stainless steel processing Resistance of the material to a given factor may only be guaranteed by laboratory tests confirming the chemical resistance to a given medium.

STEEL STEEL

The results of analyses are not considered norms.

Chemical		Temp. Cº	STEEL 1.4301 304	STEEL 1.4404 316L	
acetone		20	< 0.1	< 0.1	fc
methyl alcohol		20	< 0.1	< 0.1	a
alcohol propyl		20	< 0.1	< 0.1	di
ammonia - gas (dry)		20	< 0.1	< 0.1	tr
ammonia		boiling p.	< 0.1	< 0.1	fr
aniline		20	< 0.1	< 0.1	fu
ammonium nitrate		20	< 0.1	< 0.1	fl
copper nitrate		20	< 0.1	< 0.1	pi
silver nitrate		20	< 0.1	< 0.1	g
benzene		20	< 0.1	< 0.1	et
petroleum oils		20	< 0.1	< 0.1	g
tan liquor		20	< 0.1	< 0.1	h
butane		20	< 0.1	< 0.1	io
chlorine (wet)		20	>1	>1	m
chlorine (dry)	100%	70	< 0.1	< 0.1	xy
ammonium chloride	2004	20	0.1 - 1	0.1 - 1	ni
ammonium chloride	20%	boiling p.	0.1 - 1 SP	< 0.1 SP	ni
ammonium chloride	43%	boiling p.	< 0.1 SP	< 0.1 SP	ni
amyl chloride		20 20	< 0.1 < 0.1	< 0.1 < 0.1	ni
barium chloride		20	0.1 - 1	0.1 - 1	b
zinc chloride tin chloride		20	>1	< 0.1	b
ethyl chloride (chloroethane)		20	< 0.1	< 0.1	h
aluminum chloride		20	0.1 - 1	0.1 - 1	b
magnesium chloride		20	>1	>1	ch
methyl chloride		20	< 0.1	< 0.1	cł
cupric chloride		20	>1	>1	cł
nickel chloride		20	>1	>1	ci
potassium chloride		20	< 0.1	< 0.1	ci
sodium chloride	3%	20-60	0.1 - 1 P	< 0.1 P	p
calcium chloride		20	>1	0.1 - 1	р
calcium chloride	20%	20	< 0.1 P	< 0.1 P	p
calcium chloride	20%	boiling p.	0.1 - 1 SP	< 0.1 P	m
chlorobenzene		20	< 0.1	< 0.1	la
chloroform		20	0.1 - 1	0.1 - 1	la
cupric cyanide		20	< 0.1	< 0.1	la la
potassium cyanide		20	< 0.1	< 0.1	fc
sodium cyanide		20 20	< 0.1 < 0.1	< 0.1 < 0.1	fc
cyclohexane		20	< 0.1	< 0.1	fo
cyclohexanone		20	< 0.1	< 0.1	fc
carbon tetrachloride		20	< 0.1	< 0.1	fc
diethylamine dimethylaniline		20	< 0.1	< 0.1	p
bichloride of potassium		20	< 0.1	< 0.1	p
sodium disulphide		20	< 0.1	< 0.1	a
carbon disulphide		20	< 0.1	< 0.1	a
sulfur dioxide (dry)		20	>1	< 0.1	a
sulfur dioxide (wet)		20	x	< 0.1	a
carbon dioxide		20	< 0.1	< 0.1	a
sodium bicarbonate		20	< 0 1	< 0 1	a
phenol	5%	20	< 0.1	< 0.1	o

Chemical		Temp. Cº	STEEL 1.4301 304	STEEL 1.4404 316L
formaldehyde	37%	20	< 0.1	< 0.1
ammonium phosphate		20	0.1 - 1	>1
disodium phosphate		20	х	х
trisodium phosphate		20	< 0.1	< 0.1
freon 12		20	< 0.1	< 0.1
furfural		20	< 0.1	< 0.1
fluorine gas (wet)		20	>1	>1
propane gas		20	< 0.1	< 0.1
glycerine		20	< 0.1	< 0.1
ethylene glycol		20	< 0.1	< 0.1
glucose		20	< 0.1	< 0.1
hydroquinone		20	< 0.1	< 0.1
iodine		20	>1	>1
methyl ethyl ketone		20	< 0.1	< 0.1
xylene		20	< 0.1	< 0.1
nitric acid	30%	boiling p.	< 0.1	< 0.1
nitric acid	50%	boiling p.	0.1 - 1	0.1 - 1
nitric acid	65%	80	< 0.1	< 0.1
nitric acid	65%	boiling p.	0.1 - 1	0.1 - 1
benzoic acid		20	< 0.1	< 0.1
boric acid		20	< 0.1	< 0.1
hydrobromic acid	20%	20	>1	>1
bromic acid		20	0.1 - 1	0.1 - 1
chloroacetic acid		20	0.1 - 1	0.1 - 1
chromic acid	50%	20	>1	>1
chromic acid	10%	20	< 0.1	< 0.1
citric acid	25%	boiling p.	>1	< 0.1
citric acid	50%	20	< 0.1	< 0.1
phosphoric acid	20%	boiling p.	< 0.1	< 0.1
phosphoric acid	40%	boiling p.	< 0.1	0.1 - 1
phosphoric acid	85%	95	>1	< 0.1
maleic acid		20	< 0.1	< 0.1
lactic acid	10%	10-100	0.1 - 1	< 0.1
lactic acid	25%	20	< 0.1	< 0.1
lactic acid	50%	20-80	0.1 - 1	< 0.1
lactic acid	50%	boiling p.	>1	0.1 - 1
formic acid	5-10%	20	< 0.1	< 0.1
formic acid	10%	80	>1	< 0.1
formic acid	50%	24-40	0.1 - 1	< 0.1
formic acid	50%	boiling p.	>1	0.1 - 1
formic acid	90%	20	>1	< 0.1
perchloric acid	10%	20	>1	>1
perchloric acid	70%	20	>1	>1
acetic acid	1%	boiling p.	< 0.1	< 0.1
	10%	boiling p.	0.1 - 1	< 0.1
acetic acid	10 %	Sound b.		
acetic acid acetic acid	20%	boiling p.	>1	< 0.1
				< 0.1 < 0.1
acetic acid	20%	boiling p.	>1	
acetic acid acetic acid	20% 20%	boiling p. 20	> 1 < 0.1	< 0.1

TABLE OF CHEMICAL RESISTANCE OF MATERIALS

TABLE OF CHEMICAL RESISTANCE OF MATERIALS

Chemical		Temp. Cº	STEEL 1.4301 304	STEEL 1.4404 316L	
hypochlorous acid (chlorine water)		20	>1	>1	
palmitic acid	10%	20	< 0.1	< 0.1	
picric acid		20	< 0.1	< 0.1	
prussic acid		20	< 0.1	< 0.1	
sulphurous acid		20	0.1 - 1	< 0.1	
sulphuric acid	1%	100	>1	0.1 - 1	
sulphuric acid	5%	20	0.1 - 1	< 0.1	
sulphuric acid	5%	boiling p.	>1	>1	
sulphuric acid	10%	20	>1	< 0.1	
sulphuric acid	10%	boiling p.	>1	>1	
sulphuric acid	50%	20	>1	>1	
sulphuric acid	70%	20	>1	>1	
sulphuric acid	20-90%	20-100	>1	>1	
sulphuric acid	93%	20	>1	>1	
hydrochloric acid	0.5%	20	0.1 - 1 P	< 0.1 P	
hydrochloric acid	0.5%	boiling p.	>1	>1	
hydrochloric acid	1%	20 20	0.1 - 1 P > 1	< 0.1 P > 1	
hydrochloric acid stearic acid	40%	20	< 0.1	< 0.1	
oxalic acid		20	< 0.1	< 0.1	
carbonic acid		20	< 0.1	< 0.1	
tartaric acid		20	>1	0.1 - 1	
fatty acids		20	< 0.1	< 0.1	
cresol		20	< 0.1	< 0.1	
milk		20	< 0.1	< 0.1	
urine		20	< 0.1	< 0.1	
urea (carbamide)		20	< 0.1	< 0.1	
potassium permanganate		20	< 0.1	< 0.1	
hydrogen peroxide	90%	20	< 0.1	< 0.1	
oil		20	< 0.1	< 0.1	
vinegar		20	< 0.1	< 0.1	
ethyl acetate		20	< 0.1	< 0.1	
cottonseed oil		20	< 0.1	< 0.1	
linseed oil		20	< 0.1	< 0.1	
oils and fats		20	< 0.1	< 0.1	
mineral oils		20	X	X	
petroleum oils		20 20	< 0.1 < 0.1	< 0.1 < 0.1	
oleum		20	< 0.1	< 0.1	
beer sodium hypochlorite		20	0.1 - 1	< 0.1	
calcium hypochlorite		20	>1	0.1 - 1	
caustic potash		20	< 0.1	< 0.1	
photographic solutions		20	>1	>1	
electroplating solutions		20	< 0.1	< 0.1	
ammonium sulphate		20	0.1 - 1	< 0.1	
barium sulphate		20	< 0.1	< 0.1	
zinc sulphate		20	< 0.1	< 0.1	
aluminum sulphate		20	< 0.1	< 0.1	
magnesium sulphate		20	< 0 1	< 0 1	
copper sulphate		20	< 0.1	< 0.1	
nickel sulphate		20	< 0.1	< 0.1	

Chemical		Temp. Cº	STEEL 1.4301 304	STEEL 1.4404 316L
sodium sulphate		20	< 0.1	< 0.1
silver sulphate		20	< 0.1	< 0.1
calcium sulphate		20	< 0.1	< 0.1
ferrous sulphate		20	< 0.1	< 0.1
ammonium sulphide		20	< 0.1	< 0.1
barium sulphide		20	х	х
sodium sulphide		20	0.1 - 1	>1
sodium sulphite		20	0.1 - 1	< 0.1
sulphur		20	0.1 - 1	< 0.1
caustic soda	20%	20	< 0.1	< 0.1
caustic soda	50%	20	< 0.1	< 0.1
caustic soda	80%	20	>1	< 0.1
fruit juices and pulp		20	0.1 - 1	< 0.1
tannin (tannic acid)		20	< 0.1	< 0.1
turpentine		20	< 0.1	< 0.1
sodium thiosulfate		20	< 0.1	< 0.1
carbon monoxide		20	< 0.1	< 0.1
toluene		20	< 0.1	< 0.1
triethylamine		20	< 0.1	< 0.1
phosphorous trichloride		20	< 0.1	< 0.1
trichlorethylene		20	< 0.1	< 0.1
sugar beet syrup		20	< 0.1	< 0.1
sugarcane sap		20	X	X
potassium carbonate		20	< 0.1	< 0.1
sodium carbonate		20	< 0.1	< 0.1
calcium carbonate		20	< 0.1	< 0.1
whiskey wine		20 20	< 0.1 < 0.1	< 0.1 < 0.1
bromine water			>1	>1
chlorinated water		20 20	>1	· 0.1 -1 P
chlorinated water	1g/l	20	0.1 -1 P	0.1-1P 0.1-1P
chlorinated water	1 mg/l	20	< 0.1	< 0.1
distilled water	ring/i	20	< 0.1	< 0.1
water ("acid mine")		20	< 0.1	< 0.1
sea water (natural)		20	0.1 -1 P	< 0.1 P
water (fresh)		20	< 0.1	< 0.1
water (salt)		20	< 0.1	< 0.1
ammonium hydroxide		20	< 0.1	< 0.1
barium hydroxide	10%	20	х	х
potassium hydroxide		20	< 0.1	< 0.1
sodium hydroxide		20	0.1 - 1	< 0.1
calcium hydroxide		20	0.1 - 1	< 0.1
bleach	12,5% Cl	20	х	х
sodium base	20%	50	< 0.1	< 0.1
sodium base	20%	100	< 0.1	< 0.1
sodium base	40%	100	0.1 -1	< 0.1
sodium ferrocyanide		20	< 0.1	< 0.1

TABLE DESIGNATIONS

Corrosion factor ([mm]/year)

<0.1
0.1 - 1
> 1
х

)	\sim	c	i	c	÷	2	r	5	\sim	\sim
١	e	С	ļ	С	ι	a	I.	I	C	e

Resistance Corrosion agent

complete

partial

lack of data

non-resistant

stress corrosion risk

pitting corrosion risk

FLOOR DRAINS



FLOOR DRAINS


GENERAL INFORMATION

By standard, all floor drains and rodding eyes are made of stainless steel: AISI 304, EN 1.4301 and AISI 316L, EN 1.4404. The type of drain depends on the load class, the amount of drained liquid (medium) and design parameters (e.g. ceiling thickness).

Floor drains are made of sheet metal of thickness adapted to a defined type of drain. All elements are welded using argon shield, and then are pickled, thus ensuring high quality of joints.

ADVANTAGES OF FLOOR DRAINS

- possibility to select a grate depending on application and load class,
- easy installation,
- due to suitable trap design, each gully is also the sewer rodding eye,
- simple design,
- easy and effective cleaning.

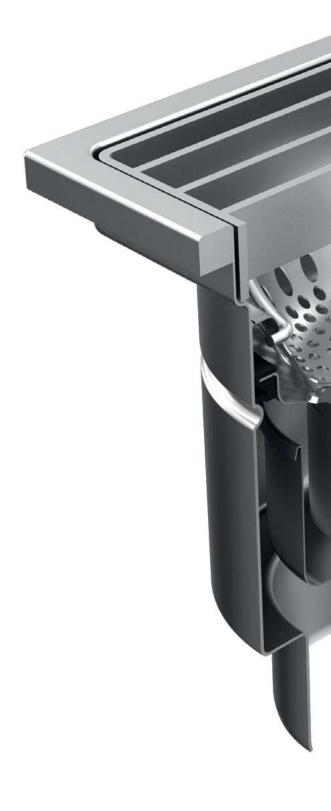

HOW TO READ CATALOGUE DESIGNATIONS


W	Wm	D	Dm	XXX	YYY	V		Н	В	D	К	Р	S
						1		2					
W	heavy du			XXX up		Н	hor	zontal	В	perfora	ited shee	t grating	
Wm	with squ mini floo		•		art mension	1	sing	le part	D	ladder	grating		
VVIII	square u							, ,	К	anti-slij	o grating		
D	heavy du					V	vert	ical	Р	plate g	rating		
Dm	with rou mini floo round up	or drain w	/ith		utlet ameter	2	two	part	S	plate gr gasket (ating witl (so-called	h circumfe 'tight cove	erence er')

EXAMPLE 1

W300/160V2-K an industrial drain, with a square top 300 [mm], an outlet diameter of 160 [mm], vertical, two-part, with a mesh grating.

EXAMPLE 2

D255/110V1-S an industrial drain, with a round top 255 [mm], an outlet diameter of 110 [mm], vertical, single-part, with a tight plate cover (plate grating with a circumference gasket)

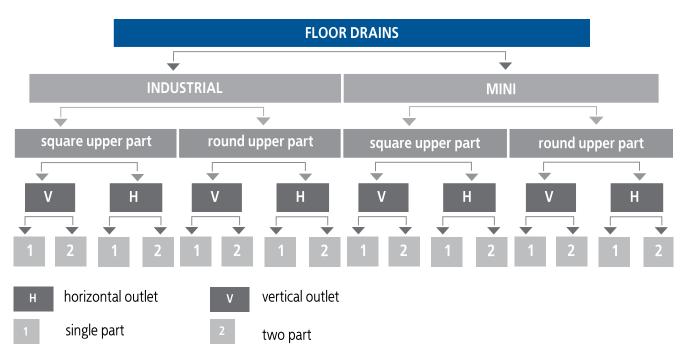

CHOOSE THE DRAIN YOU NEED

SELECTION OF FLOOR DRAINS

Appropriate floor drains are selected based on 2 main parameters:

Amount of drained wastewater (selection of appropriate diameter of the outlet and the size of the upper part).
The load value, type and intensity (the grating is the load-bearing element, which, depending on the type and height, will transfer the applied load).

FLOOR DRAINS

EXAMPLE SINGLE PART DRAIN

EXAMPLE TWO PART DRAIN



DESCRIPTION OF THE FLOOR DRAINS COMPONENTS

Bodies – round shape limits waste accumulation and enables easy waste removal. The welded joints are grinded to remove sharp edges and ensure safe installation or cleaning.

Gratings – available in various shapes, dimensions and finishing versions. The gratings are selected according to the loads and location of installation. We offer the following grating types : mesh anti-slip, ladder, plate and perforated sheet. **Waste baskets** - recommended when the drained wastewater has a high content of solids.

Strainers – used when the amount of solids is small.

Traps – very functional and easy to maintain. Ensures easy access to the sewer, quick cleaning and offers a possibility of checking for locks.

Flanges - used when it's necessary to drain water from horizontal systems installed under the floor.

AVAILABLE LOAD CLASSES OF FLOOR DRAINS IN-STALLED IN BUILDINGS AS PER PN-EN 1253



H1.5 (1.5 kN) selected for flat roofs (with no other function)



K3 (3 kN) pedestrian zones (e.g. swimming pools, balconies)



L15 (15 kN) commercial premises with low vehicular traffic



R50 (50kN)

areas with vehicular traffic (e.g. factories)



M125 (125 kN)

areas with intense vehicular traffic takes place (e.g. workshops, industrial halls)



N250 (250 kN)

areas with heavy duty vehicular traffic (e.g. workshops, industrial halls)

The given classes are defined for ideal load conditions (static). In reality, loads of elements (gratings) are more complex (dynamic).

Therefore, it is worth considering several important details when selecting a load class:

1. Will the grating be loaded by a pallet (of a specific weight) or a forklift?

2. If it will be loaded, then what will be the type and size of wheels of the forklift, and how intense will the traffic

AVAILABLE LOAD CLASSES OF GRATINGS OF CHAN-NELS INSTALLED OUTSIDE AS PER PN-EN 1433





A15 (15kN)

surfaces on which pedestrian and bicycle traffic takes place

B125 (125 kN) side drains of car parking lots, drains of pavements



C250 (250 kN) surface on which vehicular traffic of light trucks takes place



D400 (400 kN)

road carriageways (including pedestrian walkways), roadsides and parking lots for any type of road vehicles



P400 (400kN)

surfaces on which vehicular traffic of very heavy trucks takes place (food or chemical processing industry plants)

*E600 and F900 classes are also present.

be (several, several dozen, several hundred passes a day)?

The above information, along with a summary of the weight of the forklift/pallet, can enable us to select the appropriate load class.

Therefore, it should be kept in mind that at high frequency (repetitions) of loads (even with loads lighter than the nominal load), the higher load class should be selected.

FLOOR DRAINS



INSTALLATION OF SINGLE-PART FLOOR DRAINS

1. A drain pipe must be brought to the proper height 2. Place the drain in the hub of the drain pipe in a way so that the upper part of the drain is located 1-2 [mm] below the upper layer of the flooring.

3. Fill in the space with concrete.

4. When pouring concrete, do not allow obstruction of the opening clearance of the upper part of the drain. Also remember to precisely fill places that are difficult to reach with the concrete mass.

INSTALLATION OF TWO-PART FLOOR DRAINS

1. Start the installation by settling the lower part of the drain in the structural layers of the ceiling. The lower part should be settled in the cavity 15-20 [mm] in a way to ensure appropriate drainage of condensate from the vertical insulation to the drain.

2. Prepare water-proof insulation for the ceiling and install it using the pressure ring of the lower part. 3. The next step is setting and levelling of the upper part of the drain on the set offset. The edge of the upper part of the drain should be located 1-2 [mm] below the floor can be prepared.


4. After stabilising the upper part, you may prepare the remaining.

5. Fill the space with concrete.


6. When pouring concrete, do not allow obstruction of the opening clearance of the upper part of the drain,. Also remember to precisely fill places that are difficult to reach with the concrete mass.

Industrial FLOOR DRAINS vertical with square top, single-part









W200/110V1

W300/160V1

Drains	symbol	W200/75V1	W200/110V1	W300/200/110V1	W300/110V1	W300/160V1
Complete drain catalogue with anti-slip mesh grating		00.005075.21	00.005110.21	00.082110.21	00.025110.21	00.001160.21
Complete drain catalogue with ladder grating	number mat. 304	00.005075.32	00.005110.32	00.082110.32	00.025110.32	00.001160.32
Complete drain catalogue with plate grating	number mat. 304	00.005075.41	00.005110.41	00.082110.41	00.025110.41	00.001160.41
Complete drain catalogue with perforated sheet gra		00.005075.13	00.005110.13	00.082110.13	00.025110.13	00.001160.13
	DN	75	110	110	110	160
	Н	192	192	195	244	244
Dimensions	h1	60	60	60	60	90
Dimensions	D	157	157	157	255	255
	W	200x200	200x200	300x300	300x300	300x300
	hr	30	30	30	30	30
Drain body catalogue num	nber mat. 304	20.005075.07	20.005110.07	20.082110.07	20.025110.07	20.001160.07
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogu	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket	capacity []	0.45	0.45	0.45	2.9	2.9
Trap flow rate [l/s]		2.1	2.1	2.1	5.7	5.7
	anti-slip mesh	06.200164.07	06.200164.07	06.300265.07	06.300265.07	06.300265.07
Gratings serial numbers	ladder	09.200164.07	09.200164.07	09.300265.07	09.300265.07	09.300265.07
Gratings senal numbers	plate	17.200164.07	17.200164.07	17.300265.07	17.300265.07	17.300265.07
	perforated sheet	01.200165.07	01.200165.07	01.300265.07	01.300265.07	01.300265.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS



Find accessories on pages 22-23

ATT INOX ENGINEERING

Industrial FLOOR DRAINS vertical with square top, two-part



Grating Waste basket Gasket Upper part Flange 5 Trap Lower part -



Grating Vaste basket Gasket Jpper part Iange		- ⁴²
rap .ower part —		H
		щ
	DN D	

W200/110V2

W300/160V2

Drain symbol		W200/75V2	W200/110V2	W300/200/110V2	W300/110V2	W300/160V2
Complete drain catalogue with anti-slip mesh grating		00.006075.21	00.006110.21	00.083110.21	00.026110.21	00.002160.21
Complete drain catalogue with ladder grating	number mat. 304	00.006075.32	00.006110.32	00.083110.32	00.026110.32	00.002160.32
Complete drain catalogue with plate grating	number mat. 304	00.006075.41	00.006110.41	00.083110.41	00.026110.41	00.002160.41
Complete drain catalogue with perforated sheet gra		00.006075.13	00.006110.13	00.083110.13	00.026110.13	00.002160.13
	H2	80-135	80-135	80-135	80-155	80-155
	DN	75	110	110	110	160
	Н	200	200	200	172	172
Dimensions	h1	60	60	60	60	90
	D	193	193	193	295	295
	W	200x200	200x200	300x300	300x300	300x300
	hr	30	30	30	30	30
Drain body catalogue numbe	r mat. 304 upper part	40.006110.07	40.006110.07	40.083110.07	40.026110.07	40.026110.07
Drain body catalogue numbe	r mat. 304 lower part	50.006075.00	50.006110.00	50.006110.00	50.026110.00	50.002160.00
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogue n	umber *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket cap	pacity []	0.45	0.45	0.45	2.9	2.9
Trap flow rate [I/s]		2.1	2.1	2.1	5.7	5.7
	anti-slip mesh	06.200164.07	06.200164.07	06.300265.07	06.300265.07	06.300265.07
Cratings aprial purple and	ladder	09.200164.07	09.200164.07	09.300265.07	09.300265.07	09.300265.07
Gratings serial numbers	plate	17.200164.07	17.200164.07	17.300265.07	17.300265.07	17.300265.07
	perforated sheet	01.200165.07	01.200165.07	01.300265.07	01.300265.07	01.300265.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13


GRATING SYMBOLS




Industrial FLOOR DRAINS horizontal with square top, single-part









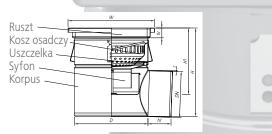

W200/110H1

W300/160H1

Drain symbol		W200/75H1	W200/110H1	W300/200/110H1	W300/110H1	W300/160H1
Complete drain catalogue with anti-slip mesh grating		00.007075.21	00.007110.21	00.084110.21	00.027110.21	00.003160.21
Complete drain catalogue with ladder grating	number mat. 304	00.007075.32	00.007110.32	00.084110.32	00.027110.32	00.003160.32
Complete drain catalogue with plate grating	number mat. 304	00.007075.41	00.007110.41	00.084110.41	00.027110.41	00.003160.41
Complete drain catalogue with perforated sheet gra		00.007075.13	00.007110.13	00.084110.13	00.027110.13	00.003160.13
	DN	75	110	110	110	160
	Н	189	224	227	264	314
Dimensions	h1	60	60	60	60	90
Dimensions	D	157	157	157	255	255
	W	200x200	200x200	300x300	300x300	300x300
	hr	30	30	30	30	30
Drain body catalogue num	nber mat. 304	20.007075.07	20.007110.07	20.084110.07	20.027110.07	20.003160.07
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogu	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket	capacity []	0.45	0.45	0.45	2.9	2.9
Trap flow rate [l/s]		2.1	2.1	2.1	5.7	5.7
	anti-slip mesh	06.200164.07	06.200164.07	06.300265.07	06.300265.07	06.300265.07
Cratings social numbers	ladder	09.200164.07	09.200164.07	09.300265.07	09.300265.07	09.300265.07
Gratings serial numbers	plate	17.200164.07	17.200164.07	17.300265.07	17.300265.07	17.300265.07
	perforated sheet	01.200165.07	01.200165.07	01.300265.07	01.300265.07	01.300265.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13


GRATING SYMBOLS






Industrial FLOOR DRAINS horizontal with square top, two-part







W300/160H2



IIIII

W200/110H2

W200/110H2 W300/200/110H2 W300/110H2 W300/160H2 Complete drain catalogue number mat. 304 00.008075.21 00.008110.21 00.085110.21 00.028110.21 00.004160.21 with anti-slip mesh grating Complete drain catalogue number mat. 304 with ladder 00.008075.32 00.008110.32 00.085110.32 00.028110.32 00.004160.32 grating Complete drain catalogue number mat. 304 with plate grating 00.008075.41 00.008110.41 00.085110.41 00.028110.41 00.004160.41 Complete drain catalogue number mat. 304 00.008110.13 00.085110.13 00.028110.13 00.004160.13 00.008075.13 with perforated sheet grating H2 40.006110.07 40.006110.07 40.083110.07 40.026110.07 40.026110.07 DN 50.008075.00 50.008110.00 50.008110.00 50.028110.00 50.004160.00 02.200110.00 02.200110.00 02.200110.00 08.300160.00 08.300160.00 Н 03.200110.00 03.200110.00 03.200110.00 09.300160.00 09.300160.00 Dimensions h1 00.200110.01 00.200110.01 00.200110.01 00.300160.01 00.300160.01 D 0.45 0.45 W 0.45 2.9 2.9 hr 2.1 2.1 2.1 5.7 5.7 06.200164.07 06.300265.07 Drain body catalogue number mat. 304 upper part 06.200164.07 06.300265.07 06.300265.07 Drain body catalogue number mat. 304 lower part 09.200164.07 09.200164.07 09.300265.07 09.300265.07 09.300265.07 Basket catalogue number 17.200164.07 17.200164.07 17.300265.07 17.300265.07 17.300265.07 Sediment basket catalogue number * 01.200165.07 01.200165.07 01.300265.07 01.300265.07 01.300265.07 Trap catalogue number 00.200110.01 00.200110.01 00.300160.01 00.300160.01 00.200110.01 Basket / sediment basket capacity [1] 0.45 0.45 0.45 2.9 2.9 Trap flow rate [I/s] 2.1 2.1 2.1 5.7 5.7 anti-slip mesh 06.200164.07 06.200164.07 06.300265.07 06.300265.07 06.300265.07 ladder 09 300265 07 09 300265 07 09 200164 07 09 200164 07 09 300265 07 Gratings serial numbers plate 17 300265 07 17 200164 07 17 200164 07 17 300265 07 17.300265.07 perforated sheet 01.300265.07 01.300265.07 01.200165.07 01.200165.07 01.300265.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS






ACCESSORIES for industrial vertical and horizontal floor drains, with square top, single- and two-part



Trap


ACCESSORIES for industrial vertical and horizontal floor drains, with square top, single- and two-part

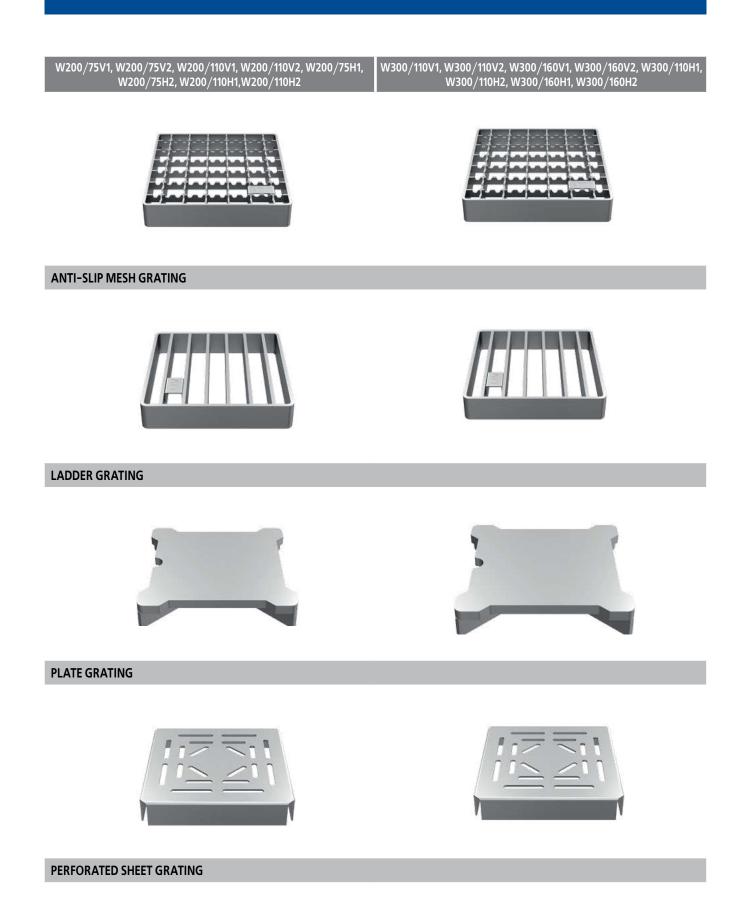


Industrial **FLOOR DRAINS** vertical with square top, single-part











W250/110V1

W400/200V1

Drains	symbol	W250/110V1	W400/200V1	
Complete drain catalogue number mat. 304 with anti-slip mesh grating		00.001110.21	00.001200.21	
Complete drain catalogue number mat. 304 with ladder grating		00.001110.32	00.001200.32	
Complete drain catalogue number mat. 30	4 with plate grating	00.001110.41	00.001200.41	
Complete drain catalogue number mat. 30	4 with perforated sheet grating	00.001110.13	00.001200.13	
	DN	110	200	
	Н	234	334	
D ¹	h1	60	90	
Dimensions	D	193	348	
	W	250x250	400x400	
	hr	30	30	
Drain body catalogue number mat. 304		20.001110.07	20.001200.07	
Basket catalogue number		04.250110.00	10.400200.00	
Sediment basket catalogue number *		05.250110.00	11.400200.00	
Trap catalogue number		00.250110.02	00.400200.02	
Basket / sediment basket capacity []		1	8.7	
Trap flow rate [l/s]		3	13.9	
	anti-slip mesh	06.250213.07	06.400365.07	
Gratings serial numbers	ladder	09.250213.07	09.400365.07	
Gratings serial numbers	plate	17.250213.07	17.400365.07	
	perforated sheet	01.250213.07	01.400365.07	

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS





Find accessories on pages 28-29

ATT INOX ENGINEERING

Industrial **FLOOR DRAINS** vertical with square top, two-part



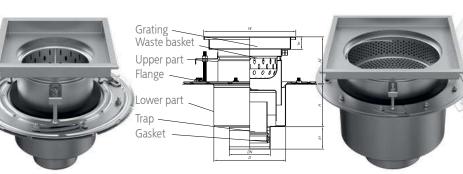



W250/110V2

W400/200V2

Drain	symbol	W250/110V2	W400/200V2	
Complete drain catalogue number mat. 304 with anti-slip mesh grating		00.002110.21	00.002200.21	
Complete drain catalogue number mat. 304 with ladder grating		00.002110.32	00.002200.32	
Complete drain catalogue number mat. 30	04 with plate grating	00.002110.41	00.002200.41	
Complete drain catalogue number mat. 304 with perforated sheet grating		00.002110.13	00.002200.13	
	H2	80-155	75-140	
	DN	110	200	
	Н	200	210	
Dimensions	h1	60	90	
	D	193	348	
	W	250x250	400x400	
	hr	30	30	
Drain body catalogue number mat. 304 up	oper part	40.002110.07	40.002200.07	
Drain body catalogue number mat. 304 lo	wer part	50.006110.00	50.002200.00	
Basket catalogue number		06.250110.00	12.400200.00	
Sediment basket catalogue number *		07.250110.00	13.400200.00	
Trap catalogue number		00.250110.02	00.400200.02	
Basket / sediment basket capacity [1]	Basket / sediment basket capacity []		5.4	
Trap flow rate [I/s]		3	13.9	
	anti-slip mesh	06.250213.07	06.400365.07	
Trap flow rate []/c]	ladder	09.250213.07	09.400365.07	
Trap flow rate [l/s]	plate	17.250213.07	17.400365.07	
	perforated sheet	01.250213.07	01.400365.07	

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS



anti-slip mesh





ladder



perforated sheet







Industrial FLOOR DRAINS horizontal with square top, single-part











W250/110H1

W400/200H1

Drains	symbol	W250/110H1	W400/200H1	
Complete drain catalogue number mat. 304 with anti-slip mesh grating		00.003110.21	00.003200.21	
Complete drain catalogue number mat. 304 with ladder grating		00.003110.32	00.003200.32	
Complete drain catalogue number mat. 30	4 with plate grating	00.003110.41	00.003200.41	
Complete drain catalogue number mat. 30	4 with perforated sheet grating	00.003110.13	00.003200.13	
	DN	110	200	
	Н	246	354	
Dimensions	h1	60	90	
Dimensions	D	193	348	
	W	250x250	400x400	
	hr	30	30	
Drain body catalogue number mat. 304		20.003110.07	20.003200.07	
Basket catalogue number		04.250110.00	14.400200.00	
Sediment basket catalogue number *		05.250110.00	15.400200.00	
Trap catalogue number		00.250110.03	00.400200.03	
Basket / sediment basket capacity []		1	2.7	
Trap flow rate [I/s]		2.1	9.2	
	anti-slip mesh	06.250213.07	06.400365.07	
Gratings serial numbers	ladder	09.250213.07	09.400365.07	
Gratings senar numbers	plate	17.250213.07	17.400365.07	
	perforated sheet	01.250213.07	01.400365.07	

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS




Find accessories on pages 28-29

ATT INOX ENGINEERING


Industrial FLOOR DRAINS horizontal with square top, two-part







W400/200H2



W250/110H2

Drain	symbol	W250/110H2	W400/200H2			
Complete drain catalogue number mat. 30	04 with anti-slip mesh grating	00.004110.21	00.004200.21			
Complete drain catalogue number mat. 304 with ladder grating		00.004110.32	00.004200.32			
Complete drain catalogue number mat. 30)4 with plate grating	00.004110.41	00.004200.41			
Complete drain catalogue number mat. 30	04 with perforated sheet grating	00.004110.13	00.004200.13			
H2 DN		95-155	75-140			
	DN	110	200			
	Н	200	320			
Dimensions	h1	60	90			
	D	193	348			
Dimensions	W	250x250	400x400			
	hr	30	30			
Drain body catalogue number mat. 304 up	oper part	40.002110.07	40.002200.07			
Drain body catalogue number mat. 304 lo	wer part	50.008110.00	50.004200.00			
Basket catalogue number		06.250110.00	12.400200.00			
Sediment basket catalogue number *		07.250110.00	13.400200.00			
Trap catalogue number		00.250110.03	00.400200.03			
Basket / sediment basket capacity []		1	5.4			
Trap flow rate [I/s]		2.1	9.2			
	anti-slip mesh	06.250213.07	06.400365.07			
Gratings serial numbers	ladder	09.250213.07	09.400365.07			
Gratings senar numbers	plate	17.250213.07	17.400365.07			
	perforated sheet	01.250213.07	01.400365.07			

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS



anti-slip mesh





ladder




perforated sheet





ACCESSORIES for industrial vertical and horizontal floor drains, with square top, single- and two-part

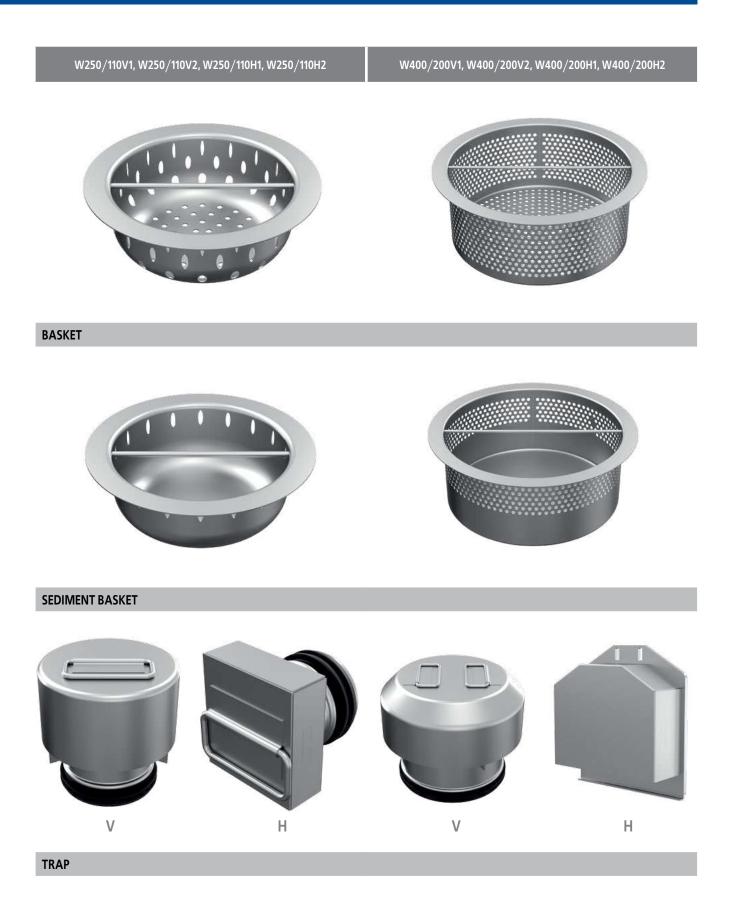


ACCESSORIES for industrial vertical and horizontal floor drains, with square top, single- and two-part




PERFORATED SHEET GRATING

Industrial FLOOR DRAINS vertical with round top, single-part









D200/110V1

	Drain symbol	D200/75V1	D200/110V1	D300/200/110V1	D300/110V1	D300/160V1
Complete drain catalogue	number mat. 304 with anti-slip mesh grating	00.015075.23	00.015110.23	00.076110.23	00.072110.23	00.072160.23
Complete drain catalogue	number mat. 304 with ladder grating	00.015075.34	00.015110.34	00.076110.34	00.072110.34	00.072160.34
Complete drain catalogue	number mat. 304 with plate grating	00.015075.43	00.015110.43	00.076110.43	00.072110.43	00.072160.43
Complete drain catalogue	number mat. 304 with tight plate	00.015075.50	00.015110.50	00.076110.50	00.072110.50	00.072160.50
	DN	75	110	110	110	160
	Н	189	189	189	240	240
Dimensions	h1	60	60	60	60	90
Dimensions	D	157	157	157	255	255
	Ø	198	198	300	300	300
	hr	25	25	25	25	25
Drain body catalogue num	nber mat. 304	20.015075.06	20.015110.06	20.076110.06	20.072110.06	20.072160.06
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogu	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket	capacity [1]	0.45	0.45	0.45	2.9	2.9
Trap flow rate [I/s]		2.1	2.1	2.1	5.7	5.7
	anti-slip mesh	06.200188.06	06.200188.06	06.300290.06	06.300290.06	06.300290.06
Gratings serial numbers	ladder	09.200188.06	09.200188.06	09.300290.06	09.300290.06	09.300290.06
	plate	17.200188.06	17.200188.06	17.300290.06	17.300290.06	17.300290.06
	tight plate	16.200188.06	16.200188.06	16.300290.06	16.300290.06	16.300290.06

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floo an 8 [mm] thi seal is used.


In case of floor drains with a tight plate cover, an 8 [mm] thick grating with a circumference seal is used.

GRATING SYMBOLS




Industrial FLOOR DRAINS vertical with round top, two-part







D300/160V2



mille

D200/110V2

	Drain symbol	D200/75V2	D200/110V2	D300/200/110V2	D300/110V2	D300/160V2
Complete drain catalogue	number mat. 304 with anti-slip mesh grating	00.016075.23	00.016110.23	00.077110.23	00.073110.23	00.073160.23
Complete drain catalogue	number mat. 304 with ladder grating	00.016075.34	00.016110.34	00.077110.34	00.073110.34	00.073160.34
Complete drain catalogue	number mat. 304 with plate grating	00.016075.43	00.016110.43	00.077110.43	00.073110.43	00.073160.43
Complete drain catalogue	number mat. 304 with tight plate	00.016075.50	00.016110.50	00.077110.50	00.073110.50	00.073160.50
	h2	75-135	75-135	75-130	75-145	75-145
	DN	75	110	110	110	160
Dimensions	Н	200	200	200	172	172
DIMENSIONS	h1	60	60	60	60	90
	D	193	193	193	295	295
	Ø	198	198	300	300	300
	hr	25	25	25	25	25
Drain body catalogue num	ber mat. 304 upper part	40.016110.06	40.016110.06	40.077110.06	40.073110.06	40.073110.06
Drain body catalogue num	ber mat. 304 lower part	50.006075.00	50.006110.00	50.006110.00	50.026110.00	50.002160.00
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogue	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket of	capacity []	0.45	0.45	0.45	2.9	2.9
Trap flow rate [I/s]		2.1	2.1	2.1	5.7	5.7
Gratings serial numbers	anti-slip mesh	06.200188.06	06.200188.06	06.300290.06	06.300290.06	06.300290.06
	ladder	09.200188.06	09.200188.06	09.300290.06	09.300290.06	09.300290.06
	plate	17.200188.06	17.200188.06	17.300290.06	17.300290.06	17.300290.06
	tight plate	16.200188.06	16.200188.06	16.300290.06	16.300290.06	16.300290.06

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floor drains with a tight plate cover, an 8 [mm] thick grating with a circumference seal is used.


GRATING SYMBOLS




Industrial FLOOR DRAINS horizontal with round top, single-part











D200/110H1

D300/160H1

	Drain symbol	D200/75H1	D200/110H1	D300/200/110H1	D300/110H1	D300/160H1
Complete drain catalogue	number mat. 304 with anti-slip mesh grating	00.017075.23	00.017110.23	00.078110.23	00.074110.23	00.074160.23
Complete drain catalogue	number mat. 304 with ladder grating	00.017075.34	00.017110.34	00.078110.34	00.074110.34	00.074160.34
Complete drain catalogue	number mat. 304 with plate grating	00.017075.43	00.017110.43	00.078110.43	00.074110.43	00.074160.43
Complete drain catalogue	number mat. 304 with tight plate	00.017075.50	00.017110.50	00.078110.50	00.074110.50	00.074160.50
	DN	75	110	110	110	160
	Н	186	221	221	260	310
Dimensions	h1	60	60	60	60	90
DIMENSIONS	D	157	157	157	255	255
	Ø	198	198	300	300	300
	hr	25	25	25	25	25
Drain body catalogue number mat. 304		20.017075.06	20.017110.06	20.078110.06	20.074110.06	20.074160.06
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogu	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket	capacity [1]	0.45	0.45	0.45	2.9	2.9
Trap flow rate [I/s]		2.1	2.1	2.1	5.7	5.7
	anti-slip mesh	06.200188.06	06.200188.06	06.300290.06	06.300290.06	06.300290.06
Cratic an and a sumble of	ladder	09.200188.06	09.200188.06	09.300290.06	09.300290.06	09.300290.06
Gratings serial numbers	plate	17.200188.06	17.200188.06	17.300290.06	17.300290.06	17.300290.06
	tight plate	16.200188.06	16.200188.06	16.300290.06	16.300290.06	16.300290.06

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.




In case of floor drains with a tight plate cover, an 8 [mm] thick grating with a circumference seal is used.

GRATING SYMBOLS




Industrial FLOOR DRAINS horizontal with round top, two-part









D200/110H2

D300/160H2

	Drain symbol	D200/75H2	D200/110H2	D300/200/110H2	D300/110H2	D300/160H2
Complete drain catalogue	number mat. 304 with anti-slip mesh grating	00.018075.23	00.018110.23	00.079110.23	00.075110.23	00.075160.23
	number mat. 304 with ladder grating	00.018075.34	00.018110.34	00.079110.34	00.075110.34	00.075160.34
Complete drain catalogue	number mat. 304 with plate grating	00.018075.43	00.018110.43	00.079110.43	00.075110.43	00.075160.43
Complete drain catalogue	number mat. 304 with tight plate	00.018075.50	00.018110.50	00.079110.50	00.075110.50	00.075160.50
	h2	75-135	75-135	75-130	75-145	75-145
	DN	75	110	110	110	160
	Н	200	200	200	172	222
Dimensions	h1	60	60	60	60	90
	D	157	157	157	295	295
	Ø	198	198	300	300	300
	hr	25	25	25	25	25
Drain body catalogue num	iber mat. 304 upper part	40.016110.06	40.016110.06	40.077110.06	40.073110.06	40.073110.06
Drain body catalogue num	ıber mat. 304 lower part	50.008075.00	50.008110.00	50.008110.00	50.028110.00	50.004160.00
Basket catalogue number		02.200110.00	02.200110.00	02.200110.00	08.300160.00	08.300160.00
Sediment basket catalogue	e number *	03.200110.00	03.200110.00	03.200110.00	09.300160.00	09.300160.00
Trap catalogue number		00.200110.01	00.200110.01	00.200110.01	00.300160.01	00.300160.01
Basket / sediment basket	capacity []	0.45	0.45	0.45	2.9	2.9
Trap flow rate [I/s]		2.1	2.1	2.1	5.7	5.7
Gratings serial numbers	anti-slip mesh	06.200188.06	06.200188.06	06.300290.06	06.300290.06	06.300290.06
	ladder	09.200188.06	09.200188.06	09.300290.06	09.300290.06	09.300290.06
	plate	17.200188.06	17.200188.06	17.300290.06	17.300290.06	17.300290.06
	tight plate	16.200188.06	16.200188.06	16.300290.06	16.300290.06	16.300290.06

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floor drains with a tight plate cover, an 8 [mm] thick grating with a circumference seal is used.

GRATING SYMBOLS




ACCESSORIES for industrial vertical and horizontal floor drains, with round top, single- and two-part



ATT INOX ENGINEERING


ACCESSORIES for industrial vertical and horizontal floor drains, with round top, single- and two-part

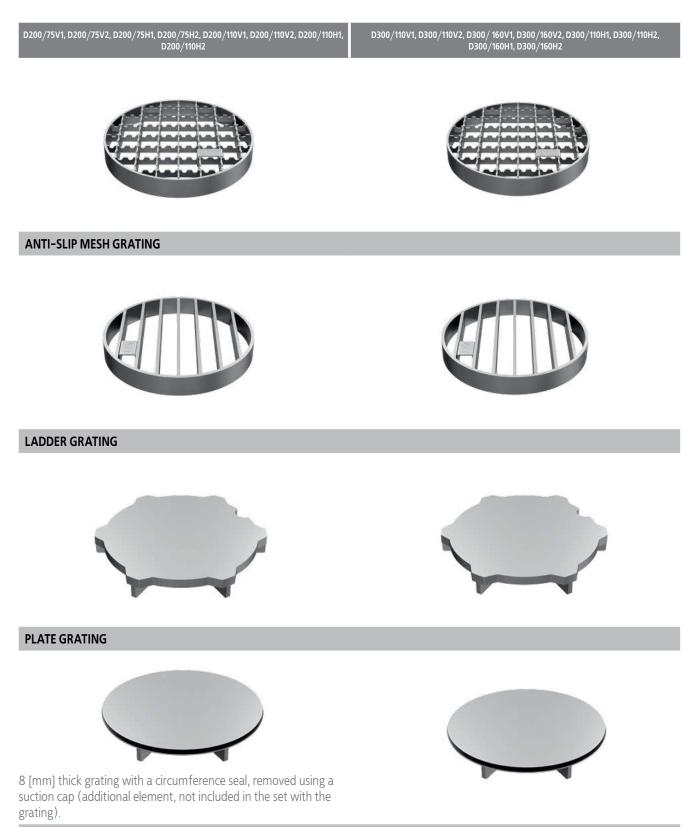


TIGHT PLATE

Industrial **FLOOR DRAINS** vertical with round top, single- and two-part









D260/110V2

	Drain	symbol	D260/110V1	D260/110V2		
	Complete drain catalogue number mat. 30	94 with anti-slip mesh grating	00.009110.23	00.010110.23		
	Complete drain catalogue number mat. 30	94 with ladder grating	00.009110.34	00.010110.34		
Complete drain catalogue number mat. 304 with plate grating Complete drain catalogue number mat. 304 with tight plate		00.009110.43	00.010110.43			
	Complete drain catalogue number mat. 30	94 with tight plate	00.009110.50	00.010110.50		
	omplete train catalogue number mat. So	h2	-	75-150		
		DN	110	110		
		Н	228	200		
	Dimensions	h1	60	60		
		D	193	193		
		Ø	260	260		
		hr	25	25		
Drain body catalogue number mat. 304 upper part		oper part	20.009110.06	20.010110.06		
	Drain body catalogue number mat. 304 lo	wer part	-	50.006110.00		
	Basket catalogue number		04.250110.00	06.250110.00		
	Sediment basket catalogue number *		05.250110.00	07.250110.00		
	Trap catalogue number		00.250110.02	00.250110.02		
	Basket / sediment basket capacity []		1	1		
	Trap flow rate [l/s]		3	3		
		anti-slip mesh	06.250250.06	06.250250.06		
	Gratings serial numbers	ladder	09.250250.06	09.250250.06		
	diatings senai numbers	plate	17.250250.06	17.250250.06		
		tight plate	16.250250.06	16.250250.06		

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floor drains with a tight plate cover, an 8 [mm] thick plate grating with a circumference seal is used.


GRATING SYMBOLS




Find accessories on pages 34-35

Industrial FLOOR DRAINS horizontal with round top, single- and two-part









D260/110H1

D260/110H2

		-	
Drain	symbol	D260/110H1	D260/110H2
Complete drain catalogue number mat. 30	94 with anti-slip mesh grating	00.011110.23	00.012110.23
Complete drain catalogue number mat. 30	14 with ladder grating	00.011110.34	00.012110.34
Complete drain catalogue number mat. 30	94 with plate grating	00.011110.43	00.012110.43
Complete drain catalogue number mat. 30	14 with tight plate	00.011110.50	00.012110.50
	h2	-	100-145
	DN	110	110
	Н	223	200
Dimensions	h1	60	60
	D	193	193
	Ø	260	260
	hr	25	25
Drain body catalogue number mat. 304 up	oper part	20.011110.06	20.010110.06
Drain body catalogue number mat. 304 lo	wer part	-	50.008110.00
Basket catalogue number		04.250110.00	06.250110.00
Sediment basket catalogue number *		05.250110.00	07.250110.00
Trap catalogue number		00.250110.03	00.250110.03
Basket / sediment basket capacity [1]		1	1
Trap flow rate [l/s]		2.1	2.1
	anti-slip mesh	06.250250.06	06.250250.06
Gratings serial numbers	ladder	09.250250.06	09.250250.06
Gratings serial numbers	plate	17.250250.06	17.250250.06
	tight plate	16.250250.06	16.250250.06

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13 * to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floor drains with a tight plate cover, an 8 [mm] thick plate grating with a circumference seal is used.

GRATING SYMBOLS




Find accessories on pages 34-35

ACCESSORIES for industrial vertical and horizontal drains, with round top, single-part and two-part




Industrial **FLOOR DRAINS** anti-odour, vertical with square top, single-part and two-part









Inti

WA200/110V1

WA200/110V2

Drain symbol		Wa200/110V1	Wa200/110V2
Complete drain catalogue number mat. 30	4 with anti-slip mesh grating	00.021110.21	00.022110.21
Complete drain catalogue number mat. 30	4 with ladder grating	00.021110.32	00.022110.32
Complete drain catalogue number mat. 30	4 with plate grating	00.021110.41	00.022110.41
Complete drain catalogue number mat. 30	4 with perforated sheet grating	00.021110.13	00.022110.13
	H2	-	120-175
	DN	110	110
	Н	245	200
Dimensions	h1	60	60
	D	157	193
	W	200x200	200x200
	hr	25	25
Drain body catalogue number mat. 304 up	per part	20.021110.07	40.022110.07
Drain body catalogue number mat. 304 lov	wer part	-	50.006110.00
Anti-odour element		00.200110.08	00.200110.08
Basket catalogue number		02.200110.00	02.200110.00
Sediment basket catalogue number *		03.200110.00	03.200110.00
Trap catalogue number		00.200110.01	00.200110.01
Basket / sediment basket capacity []		0.45	0.45
Trap flow rate [I/s]		2.1	2.1
	anti-slip mesh	06.200164.07	06.200164.07
Gratings serial numbers	ladder	09.200164.07	09.200164.07
Gratings senal numbers	plate	17.200164.07	17.200164.07
	perforated sheet	01.200165.07	01.200165.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS



anti-slip mesh





ladder





perforated sheet






plate




Industrial FLOOR DRAINS anti-odour, horizontal with square top, single- part and two-part









10011

WA200/110H1

WA200/110H2

Drain s	ymbol	Wa200/110H1	Wa200/110H2
Complete drain catalogue number mat. 30	4 with anti-slip mesh grating	00.023110.21	00.024110.21
Complete drain catalogue number mat. 30	4 with ladder grating	00.023110.32	00.024110.32
Complete drain catalogue number mat. 30	4 with plate grating	00.023110.41	00.024110.41
Complete drain catalogue number mat. 30	4 with perforated sheet grating	00.023110.13	00.024110.13
	H2	-	120-175
	DN	110	110
	Н	274	212
Dimensions	h1	60	60
	D	157	193
	W	200x200	200x200
	hr	30	30
Drain body catalogue number mat. 304 up	per part	20.023110.07	40.024110.07
Drain body catalogue number mat. 304 lov	ver part	-	50.008110.00
Anti-odour element		00.200110.08	00.200110.08
Basket catalogue number		02.200110.00	02.200110.00
Sediment basket catalogue number *		03.200110.00	03.200110.00
Trap catalogue number		00.200110.01	00.200110.01
Basket / sediment basket capacity []		0.45	0.45
Trap flow rate [I/s]		2.1	2.1
	anti-slip mesh	06.200164.07	06.200164.07
Gratings serial numbers	ladder	09.200164.07	09.200164.07
Gratings selid humbers	plate	17.200164.07	17.200164.07
	perforated sheet	01.200165.07	01.200165.07

* to order a complete drain with a sand sediment basket, change the second digit of the catalogue number to "1", e.g. 01.005075.13

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.005075.13, with a sand sediment basket, change the second digit to "3", e.g. 13.005075.13

GRATING SYMBOLS



anti-slip mesh





ladder





perforated sheet






plate




Mini **FLOOR DRAINS** vertical with square top, single-part





WITH DN 50 OUTLET





WITH DN 110 OUTLET

Drain symbo		Wmk150/50V1	Wmk150/75V1	Wmk150/110V1
Complete drain catalogue number mat. 304 with perforated sheet grating		08.056050.70	08.056075.70	08.056110.70
	DN	50	75	110
	Н	132	132	120
Dimensions	h1	60	60	-
Dimensions	D	110	110	110
	W	150x150	150x150	150x150
	hr	2	2	2
Drain body catalogue number mat. 30)4	28.056050.01	28.056075.01	28.056110.01
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number Trap flow rate [l/s]		01.150110.00	01.150110.00	01.150110.00
		0.9	0.9	0.9
Grating catalogue no.	perforated sheet	01.150135.01	01.150135.01	01.150135.01

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED SHEET GRATING IS AVAILABLE FOR WMK150 DRAINS






Mini FLOOR DRAINS vertical with square top, two-part



Grating Strainer Gasket Upper part Flange Trap Lower part





WITH DN 110 OUTLET

Drain symbo	I	Wmk150/50V2	Wmk150/75V2	Wmk150/110V2
Complete drain catalogue number ma sheet grating	at. 304 with perforated	08.057050.70	08.057075.70	08.057110.70
	H2	50-105	50-105	50-105
	DN	50	75	110
	Н	130	130	130
Dimensions	h1	60	60	60
	D	137	137	137
	W	150x150	150x150	150x150
	hr	2	2	2
Drain body catalogue number mat. 30	04 upper part	28.056110.01	28.056110.01	28.056110.01
Drain body catalogue number mat. 30	04 lower part	50.057050.00	50.057075.00	50.057110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated sheet	01.150135.01	01.150135.01	01.150135.01

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70


PERFORATED SHEET GRATING IS AVAILABLE FOR WMK150 FLOOR DRAINS





Mini **FLOOR DRAINS** horizontal with square top, single-part





WITH DN 50 OUTLET



Grating Strainer Gasket Trap Body

WITH DN 110 OUTLET

Drain symbol		Wmk150/50H1	Wmk150/75H1	Wmk150/110H1
Complete drain catalogue number mat. 304 v	vith perforated sheet grating	08.058050.70	08.058075.70	08.058110.70
	DN	50	75	110
	Н	132	132	165
Dimensions	h1	60	60	60
Dimensions	D	110	110	110
	W	150x150	150x150	150x150
	hr	2	2	2
Drain body catalogue number mat. 304		28.058050.01	28.058075.01	28.058110.01
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [I/s]		0.9	0.9	0.9
Grating catalogue no.	perforated sheet	01.150135.01	01.150135.01	01.150135.01

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED SHEET GRATING IS AVAILABLE FOR WMK150 FLOOR DRAINS







Mini FLOOR DRAINS horizontal with square top, two-part



WITH DN 50 OUTLET



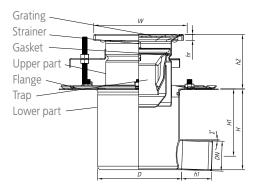

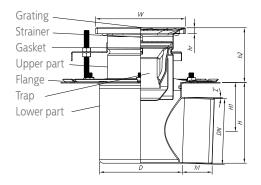

WITH DN 110 OUTLET

Drain symbol		Wmk150/50H2	Wmk150/75H2	Wmk150/110H2
Complete drain catalogue number mat. 304 v	vith perforated sheet grating	08.059050.70	08.059050.70	08.059050.70
	H2	50-105	50-105	50-105
	DN	50	75	110
	Н	135	135	135
Dimensions	h1	60	60	60
	D	110	110	110
	W	150x150	150x150	150x150
	hr	2	2	2
Drain body catalogue number mat. 304 upper	r part	28.056110.01	28.056110.01	28.056110.01
Drain body catalogue number mat. 304 lower	part	50.059050.00	50.059075.00	50.059110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated sheet	01.150135.01	01.150135.01	01.150135.01

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED SHEET GRATING IS AVAILABLE FOR WMK150 FLOOR DRAINS






Mini FLOOR DRAINS vertical with square top, single-part



Grating Strainer Gasket Trap Body



WITH DN 50 OUTLET





WITH DN 110 OUTLET

Drain symbol		Wm150/50V1	Wm150/75V1	Wm150/110V1
Complete drain catalogue number mat. 304 w	Complete drain catalogue number mat. 304 with perforated plate grating		08.032075.60	08.032110.60
	DN	50	75	110
	Н	137	137	125
Dimensions	h1	60	60	-
Dimensions	D	110	110	110
	W	150x150	150x150	150x150
	hr	10	10	10
Drain body catalogue number mat. 304		28.032050.04	28.032075.04	28.032110.04
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated plate	20.150141.04	20.150141.04	20.150141.04

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED PLATE GRATING IS AVAILABLE FOR WM150 FLOOR DRAINS




Mini FLOOR DRAINS vertical with square top, two-part



WITH DN 50 OUTLET



WITH DN 110 OUTLET

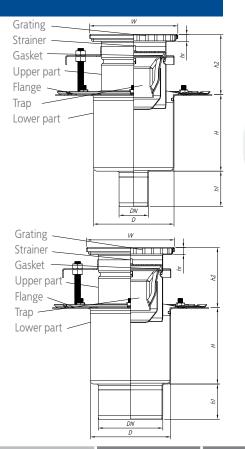

Drain symbol		Wm150/50V2	Wm150/75V2	Wm150/110V2
Complete drain catalogue number mat. 304 v	vith perforated plate grating	08.033050.60	08.033075.60	08.033110.60
	H2	60-110	60-110	60-110
	DN	50	75	110
	Н	130	130	130
Dimensions	h1	60	60	60
	D	137	137	137
	W	150x150	150x150	150x150
	hr	10	10	10
Drain body catalogue number mat. 304 upper	r part	28.032110.04	28.032110.04	28.032110.04
Drain body catalogue number mat. 304 lower	part	50.057050.00	50.057075.00	50.057110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated plate	20.150141.04	20.150141.04	20.150141.04

* to order a complete drain with a sand sediment basket, change the first digit of the catalogue number to "1", e.g. 10.005075.13


PERFORATED PLATE GRATING IS AVAILABLE FOR WM150 FLOOR DRAINS






Mini FLOOR DRAINS horizontal with square top, single-part





WITH DN 50 OUTLET





WITH DN 110 OUTLET

Drain symbol		Wm150/50H1	Wm150/75H1	Wm150/110H1
Complete drain catalogue number mat. 304 w	vith perforated plate grating	08.042050.60	08.042075.60	08.042110.60
	DN	50	75	110
	Н	137	137	170
Dimensions	h1	60	60	60
Dimensions	D	110	110	110
	W	150x150	150x150	150x150
	hr	10	10	10
Drain body catalogue number mat. 304	Drain body catalogue number mat. 304		28.042075.01	28.042110.01
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated plate	20.150141.04	20.150141.04	20.150141.04

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED PLATE GRATING IS AVAILABLE FOR WM150 FLOOR DRAINS




•

Mini FLOOR DRAINS horizontal with square top, two-part




WITH DN 50 OUTLET

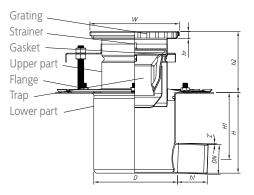





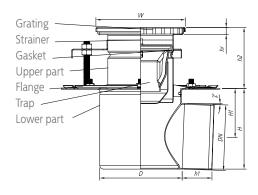

WITH DN 110 OUTLET

Drain symbol		Wm150/50H2	Wm150/75H2	Wm150/110H2
Complete drain catalogue number mat. 304 w	vith perforated plate grating	08.043050.60	08.043075.60	08.043110.60
	H2	60-110	60-110	60-110
	DN	50	75	110
	Н	135	135	135
Dimensions	h1	60	60	60
	D	137	137	137
	W	150x150	150x150	150x150
	hr	10	10	10
Drain body catalogue number mat. 304 upper part		28.032110.04	28.032110.04	28.032110.04
Drain body catalogue number mat. 304 lower	part	50.059050.00	50.059075.00	50.059110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
Grating catalogue no.	perforated plate	20.150141.04	20.150141.04	20.150141.04
* to read as a consultate during seconds of 210 meeters			05 60 50 70	

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

PERFORATED PLATE GRATING IS AVAILABLE FOR WM150 FLOOR DRAINS



perforated plate





Mini FLOOR DRAINS vertical with square top, single-part



WITH DN 50 OUTLET







WITH DN 110 OUTLET

Drain symbol		Wm200/50V1	Wm200/75V1	Wm200/110V1
Complete drain catalogue number mat. 304 v	vith anti-slip mesh grating	00.030050.20	00.030075.20	00.030110.20
Complete drain catalogue number mat. 304 v	vith ladder grating	00.030050.31	00.030075.31	00.030110.31
Complete drain catalogue number mat. 304 v	vith plate grating	00.030050.40	00.030075.40	00.030110.40
Complete drain catalogue number mat. 304 v	vith perforated sheet grating	00.030050.12	00.030075.12	00.030110.12
	DN	50	75	110
	Н	149	149	137
Dimensions	h1	60	60	-
Dimensions	D	110	110	110
	W	200x200	200x200	200x200
	hr	20	20	20
Drain body catalogue number mat. 304		20.030050.05	20.030075.05	20.030110.05
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
	mesh	06.200164.05	06.200164.05	06.200164.05
Crating catalogue po	ladder	09.200164.05	09.200164.05	09.200164.05
Grating catalogue no.	plate	10.200164.05	10.200164.05	10.200164.05
	perforated sheet	01.200165.05	01.200165.05	01.200165.05

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh





ladder










perforated sheet



Mini FLOOR DRAINS vertical with square top, two-part





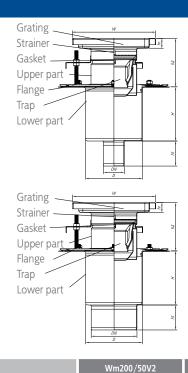

Complete drain catalogue number mat. 304 v	vith anti-slip mesh grating	00.031050.20	00.031075.20	00.031110.20
Complete drain catalogue number mat. 304 v	vith ladder grating	00.031050.31	00.031075.31	00.031110.31
Complete drain catalogue number mat. 304 v	vith plate grating	00.031050.40	00.031075.40	00.031110.40
Complete drain catalogue number mat. 304 v	vith perforated sheet grating	00.031050.12	00.031075.12	00.031110.12
	H2	70-120	70-120	70-120
	DN	50	75	110
	Н	130	130	130
Dimensions	h1	60	60	60
	D	137	137	137
	W	200x200	200x200	200x200
	hr	20	20	20
Drain body catalogue number mat. 304 uppe	r part	20.030110.05	20.030110.05	20.030110.05
Drain body catalogue number mat. 304 lower	part	50.057050.00	50.057075.00	50.057110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
	anti-slip mesh	06.200164.05	06.200164.05	06.200164.05
Crating catalogue no	ladder	09.200164.05	09.200164.05	09.200164.05
Grating catalogue no.	plate	10.200164.05	10.200164.05	10.200164.05
	perforated sheet	01.200165.05	01.200165.05	01.200165.05

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh





ladder





Wm200/75V2

Wm200/110V2









Mini FLOOR DRAINS horizontal with square top, single-part





WITH DN 110 OUTLET





Drain symbol		Wm200/50H1	Wm200/75H1	Wm200/110H1
Complete drain catalogue number mat. 304 w	vith anti-slip mesh grating	00.040050.20	00.040075.20	00.040110.20
Complete drain catalogue number mat. 304 w	vith ladder grating	00.040050.31	00.040075.31	00.040110.31
Complete drain catalogue number mat. 304 w	vith plate grating	00.040050.40	00.040075.40	00.040110.40
Complete drain catalogue number mat. 304 p	erforated sheet grating	00.040050.12	00.040075.12	00.040110.12
	DN	50	75	110
	Н	149	149	182
Dimensions	h1	60	60	60
DIMENSIONS	D	110	110	110
	W	200x200	200x200	200x200
	hr	20	20	20
Drain body catalogue number mat. 304		20.040050.05	20.040075.05	20.040110.05
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
	anti-slip mesh	06.200164.05	06.200164.05	06.200164.05
Grating catalogue no.	ladder	09.200164.05	09.200164.05	09.200164.05
Grating catalogue no.	plate	10.200164.05	10.200164.05	10.200164.05
	perforated sheet	01.200165.05	01.200165.05	01.200165.05

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh





ladder





plate








Mini FLOOR DRAINS horizontal with square top, two-part

Grating Strainer Gasket



WITH DN 50 OUTLET



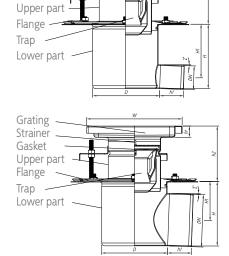

WITH DN 110 OUTLET

Drain symbol		Wm200/50H2	Wm200/75H2	Wm200/110H2
Complete drain catalogue number mat. 304 v	vith anti-slip mesh grating	00.041050.20	00.041075.20	00.041110.20
Complete drain catalogue number mat. 304 v	vith ladder grating	00.041050.31	00.041075.31	00.041110.31
Complete drain catalogue number mat. 304 v	vith plate grating	00.041050.40	00.041075.40	00.041110.40
Complete drain catalogue number mat. 304 v	vith perforated sheet grating	00.041050.12	00.041075.12	00.041110.12
	H2	70-120	70-120	70-120
	DN	50	75	110
	Н	135	135	135
Dimensions	h1	60	60	60
	D	137	137	137
	W	200x200	200x200	200x200
	hr	20	20	20
Drain body catalogue number mat. 304 uppe	r part	20.030110.05	20.030110.05	20.030110.05
Drain body catalogue number mat. 304 lowe	r part	50.059050.00	50.059075.00	50.059110.00
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9
	anti-slip mesh	06.200164.05	06.200164.05	06.200164.05
Grating catalogue no.	ladder	09.200164.05	09.200164.05	09.200164.05
Grating catalogue no.	plate	10.200164.05	10.200164.05	10.200164.05
	perforated sheet	01.200165.05	01.200165.05	01.200165.05

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh





ladder












Mini FLOOR DRAINS vertical with round top, single-part




WITH DN 50 OUTLET



WITH DN 110 OUTLET





Drain syml	ool	Dm160/50V1	Dm200/50V1	Dm160/75V1	Dm200/75V1	Dm160/110V1	Dm200/110V1
Complete drain catalogue r with anti-slip mesh grating		08.036050.23	08.034050.23	08.036075.23	08.034075.23	08.036110.23	08.034110.23
Complete drain catalogue r with ladder grating	number mat. 304	08.036050.34	08.034050.34	08.036075.34	08.034075.34	08.036110.34	08.034110.34
Complete drain catalogue r with plate grating	umber mat. 304	08.036050.43	08.034050.43	08.036075.43	08.034075.43	08.036110.43	08.034110.43
Complete drain catalogue r with tight plate grating	umber mat. 304	08.036050.50	08.034050.50	08.036075.50	08.034075.50	08.036110.50	08.034110.50
	DN	50	50	75	75	110	110
	Н	156	156	156	156	144	144
	h1	60	60	60	60	-	-
Dimensions	D	110	110	110	110	110	110
	Ø	162	198	162	198	162	198
	hr	25	25	25	25	25	25
Drain body catalogue numb	per mat. 304	28.036050.06	28.034050.06	28.036075.06	28.034075.06	28.036110.06	28.034110.06
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01	00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00	01.150110.00	01.150110.00	01.150110.00
Trap flow rate [I/s]		0.9	0.9	0.9	0.9	0.9	0.9
	anti-slip mesh	06.160152.06	06.200188.06	06.160152.06	06.200188.06	06.160152.06	06.200188.06
Casting antick and a	ladder	09.160152.06	09.200188.06	09.160152.06	09.200188.06	09.160152.06	09.200188.06
Grating catalogue no.	plate	17.160152.06	17.200188.06	17.160152.06	17.200188.06	17.160152.06	17.200188.06
	tight plate	16.160152.06	16.200188.06	16.160152.06	16.200188.06	16.160152.06	16.200188.06

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh







plate

In case of floor drains with a tight plate cover, an 8 [mm]

thick plate grating with a circumference seal is used.





This is an additional element – it is not available in the drain set.




ATT INOX ENGINEERING

53

Mini FLOOR DRAINS vertical with round top, single-part







Drain symbol		Dms160/110V1
Complete drain catalogue number mat. 304 v	08.038110.57	
	DN	110
	Н	124
Dimensione	h1	-
Dimensions	D	110
	Ø	160
	hr	5
Drain body catalogue number mat. 304		28.038110.02
Trap catalogue number		00.150110.01
Strainer catalogue number		01.150110.00
Trap flow rate [I/s]		0.9
Grating catalogue no.	plate	20.160152.02

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70


GRATING SYMBOL



For Dms160/110V1 floor drain only perforated plate (P) grating is available.


Mini FLOOR DRAINS vertical with round top, two-part







WITH DN 110 OUTLET



WITH DN 50 OUTLET

Dm160/50V2 Dm200/50V2 Dm160/75V2 Dm200/75V2 Dm160/110V2 Dm200/110V2 Complete drain catalogue number mat. 304 08.037050.43 08.035050.43 08.037075.43 08.035075.43 08.037110.43 08.035110.43 with anti-slip mesh grating Complete drain catalogue number mat. 304 08.037050.50 08.035050.50 08.037075.50 08.035075.50 08.037110.50 08.035110.50 with ladder grating Complete drain catalogue number mat. 304 00.037050.43 00.035050.43 00.037075.43 00.035075.43 00.037110.43 00.035110.43 with plate grating Complete drain catalogue number mat. 304 00.037050.50 00.035050.50 00.037075.50 00.035075.50 00.037110.50 00.035110.50 with tight plate grating H2 75-125 75-125 75-125 75-125 75-125 75-125 DN 50 50 110 110 75 75 130 130 130 130 130 130 Н Dimensions h1 60 60 60 60 60 60 D 137 137 137 137 137 137 Ø 162 198 162 198 162 198 hr 25 25 25 25 25 25 Drain body catalogue number mat. 304 28.036110.06 28.034110.06 28.034110.06 28.036110.06 28.034110.06 28 036110 06 upper part Drain body catalogue number mat. 304 50.057050.00 50.057075.00 50.057110.00 50.057110.00 50.057050.00 50.057075.00 lower part 00.150110.01 00.150110.01 00.150110.01 00.150110.01 00.150110.01 00.150110.01 Trap catalogue number 01.150110.00 Strainer catalogue number 01.150110.00 01.150110.00 01.150110.00 01.150110.00 01.150110.00 Trap flow rate [l/s] 0.9 0.9 0.9 0.9 0.9 0.9 06.160152.06 06.200188.06 06.160152.06 06.200188.06 06.200188.06 anti-slip mesh 06.160152.06 ladder 09.160152.06 09.200188.06 09.160152.06 09.200188.06 09.160152.06 09.200188.06 Grating catalogue no. 17.200188.06 plate 17.160152.06 17.200188.06 17.160152.06 17.200188.06 17.160152.06 16.200188.06 16.200188.06 16.160152.06 16.200188.06 16.160152.06 tight plate 16.160152.06

Drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

* to order a complete drain with a sand sediment basket, change the first digit of the catalogue number to "1", e.g. 10.005075.13

GRATING SYMBOLS



anti-slip mesh







In case of floor drains with a tight plate cover, an 8 [mm]

thick plate grating with a circumference seal is used.

plate









Mini FLOOR DRAINS horizontal with round top, single-part



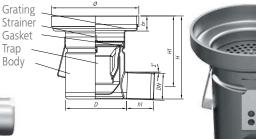



WITH DN 50 OUTLET

WITH DN 110 OUTLET

Drain symb	ool	Dm160/50H1	Dm200/50H1	Dm160/75H1	Dm200/75H1	Dm160/110H1	Dm200/110H1
Complete drain catalogue n with anti-slip mesh grating	umber mat. 304	08.046050.23	08.044050.23	08.046075.23	08.044075.23	08.046110.23	08.044110.23
Complete drain catalogue n with ladder grating	umber mat. 304	08.046050.34	08.044050.34	08.046075.34	08.044075.34	08.046110.34	08.044110.34
Complete drain catalogue n with plate grating	umber mat. 304	08.046050.43	08.044050.43	08.046075.43	08.044075.43	08.046110.43	08.044110.43
Complete drain catalogue n with tight plate grating	umber mat. 304	08.046050.50	08.044050.50	08.046075.50	08.044075.50	08.046110.50	08.044110.50
	DN	50	50	75	75	110	110
	Н	156	156	156	156	189	189
Dimensions	h1	60	60	60	60	60	60
Dimensions	D	110	110	110	110	110	110
	Ø	162	198	162	198	162	198
	hr	25	25	25	25	25	25
Drain body catalogue numb	per mat. 304	28.046050.06	28.044050.06	28.046075.06	28.044075.06	28.046110.06	28.044110.06
Trap catalogue number		00.150110.01	00.150110.01	00.150110.01	00.150110.01	00.150110.01	00.150110.01
Strainer catalogue number		01.150110.00	01.150110.00	01.150110.00	01.150110.00	01.150110.00	01.150110.00
Trap flow rate [l/s]		0.9	0.9	0.9	0.9	0.9	0.9
	anti-slip mesh	06.160152.06	06.200188.06	06.160152.06	06.200188.06	06.160152.06	06.200188.06
Crating catalogue as	ladder	09.160152.06	09.200188.06	09.160152.06	09.200188.06	09.160152.06	09.200188.06
Grating catalogue no.	plate	17.160152.06	17.200188.06	17.160152.06	17.200188.06	17.160152.06	17.200188.06
	tight plate	16.160152.06	16.200188.06	16.160152.06	16.200188.06	16.160152.06	16.200188.06

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh







In case of floor drains with a tight plate cover, an 8 [mm] thick plate grating with a circumference seal is used.








cover is removed using a suction cap. This is an additional element – it is not available in the drain set.





Mini FLOOR DRAINS horizontal with round top, two-part







WITH DN 110 OUTLET

Grating Strainer Gasket Upper part Flange Trap Lower part

WITH DN 50 OUTLET

Dm160/50H2 Dm200/50H2 Dm160/75H2 Dm200/75H2 Dm160/110H2 Dm200/110H2 Complete drain catalogue number mat. 304 08.047050.23 08.045110.23 08.045050.23 08.047075.23 08.045075.23 08.047110.23 with anti-slip mesh grating Complete drain catalogue number mat. 304 08.047050.34 08.045050.34 08.047075.34 08.045075.34 08.047110.34 08.045110.34 with ladder grating Complete drain catalogue number mat. 304 08.047050.43 08.045110.43 08 045050 43 08 047075 43 08 045075 43 08 047110 43 with plate grating Complete drain catalogue number mat. 304 08.047050.50 08.045110.50 08.045050.50 08.047075.50 08.045075.50 08.047110.50 with tight plate grating H2 75-125 75-125 75-125 75-125 75-125 75-125 DN 50 50 75 110 110 75 135 135 135 135 135 135 н 60 60 60 60 Dimensions h1 60 60 D 137 137 137 137 137 137 Ø 162 162 198 198 162 198 hr 25 25 25 25 25 25 Drain body catalogue number mat. 304 28.036110.06 28.034110.06 28.036110.06 28.034110.06 28.036110.06 28.034110.06 upper part Drain body catalogue number mat. 304 50.059050.00 50.059050.00 50.059075.00 50.059075.00 50.059110.00 50.059110.00 lower part Trap catalogue number 00.150110.01 00.150110.01 00.150110.01 00.150110.01 00.150110.01 00.150110.01 Strainer catalogue number 01.150110.00 01.150110.00 01.150110.00 01.150110.00 01.150110.00 01.150110.00 Trap flow rate [I/s] 0.9 0.9 0.9 0.9 0.9 0.9 anti-slip mesh 06.160152.06 06.200188.06 06.160152.06 06.200188.06 06.160152.06 06.200188.06 ladder 09.160152.06 09.200188.06 09.160152.06 09.200188.06 09.160152.06 09.200188.06 Grating catalogue no. plate 17.160152.06 17.200188.06 17.160152.06 17.200188.06 17.160152.06 17.200188.06 16.160152.06 16.200188.06 16.160152.06 16.200188.06 16.160152.06 16.200188.06 tight plate

* to order a complete drain made of 316 material, change the first digit of the catalogue number to "1", e.g. 10.056050.70

GRATING SYMBOLS



anti-slip mesh







-








Floor drain grating with a tight plate cover is removed using a suction cap. This is an additional element – it is not available in the drain set.

In case of floor drains with a tight plate cover, an 8 [mm] thick plate grating with a circumference seal is used.





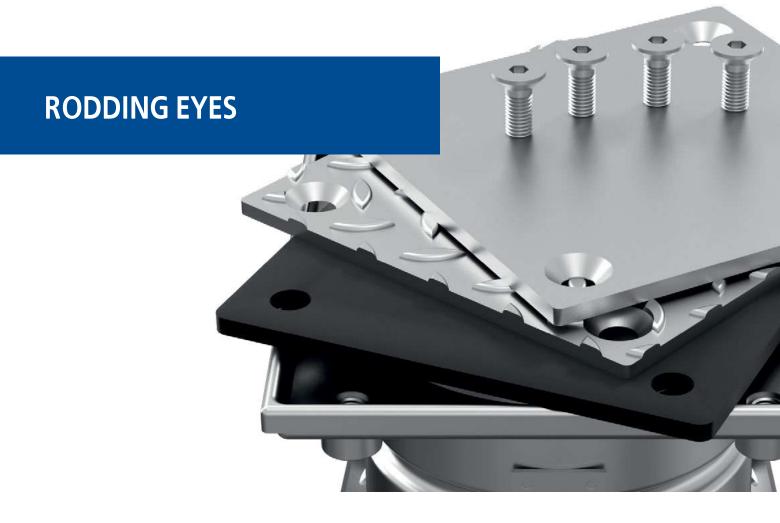

These sewage system elements are widely applied in industrial facilities (chemical, food, pharmaceutical plants etc.). Use of a rodding eye allows quick access to the underfloor area and easy cleaning.

Rodding eyes are made of AISI304 or AISI316 grade steel. Penetration of water is prevented by the seal installed between the bolted cover and the body.

Two types of covers are available:

- smooth (G),
- checker plate (R).

Edge finish allows for installation in any type of floor.

We offer rodding eyes for sewage pipes of diameters from DN110.

ADVANTAGES OF RODDING EYES

- resistant to corrosion,
- provide a barrier against odours,
- easy installation,
- dimensions of offered rodding eyes are adapted to the sewage system diameter,
- an aesthetically pleasing design element.

INSTALLATION OF RODDING EYES

1. Drain pipe must be connected at an appropriate height.

2. While pouring concrete, the upper part of the rodding eye must be located approximately 1-1.5 [mm] below the floor.

RODDING EYES

Symbol	Catalogue number.	Dimensions [mm]	
Rw 150/110		DN	110
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.050110.53	W	150
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.050110.54	Н	126
Smooth plate grating	11.150141.02		
Checker plate grating	13.150141.02		

Symbol	Catalogue number.	Dimensio	ons [mm]
Rw 200/160		DN	160
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.051160.53	W	200
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.051160.54	н	127
Smooth plate grating	11.200195.02		
Checker plate grating	13.200195.02		

Symbol	Catalogue number.	Dimensio	ons [mm]
Rw 250/200		DN	200
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.053200.53	W	300
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.053200.54	Н	127
Smooth plate grating	11.300295.02		
Checker plate grating	13.300295.02		

Symbol	Catalogue number.	Dimensio	ons [mm]
Rw 300/200		DN	200
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	00.053200.53	W	300
Catalogue number of complete rodding eye mat. 304 with checker plate grating	00.053200.54	Н	127
Smooth plate grating	11.300295.02		
Checker plate grating	13.300295.02		

Symbol	Catalogue number.	Dimensio	ons [mm]
Rw 200/110		DN	110
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.051110.53	W	200
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.051110.54	Н	127
Smooth plate grating	11.200195.02		
Checker plate grating	13.200195.02		






Symbol	Catalogue number.	Dimensions [mm]	
Rw 250/160		DN	160
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.052160.53	W	250
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.052160.54	Н	127
Smooth plate grating	11.250245.02		
Checker plate grating	13.250245.02		

Symbol	Catalogue number.	Dimensions [mm]	
Rw 300/160		DN	160
Catalogue number of complete rodding eye mat. 304 with smooth plate grating	08.053160.53	W	300
Catalogue number of complete rodding eye mat. 304 with checker plate grating	08.053160.54	н	127
Smooth plate grating	11.300295.02		
Checker plate grating	13.300295.02		

RODDING EYES

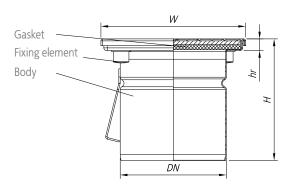



CHECKER PLATE COVER



SMOOTH COVER




ELEMENTS OF RODDING EYE

- body,
- cover,
- fixing screws,
- seal.

LINEAR DRAINAGE



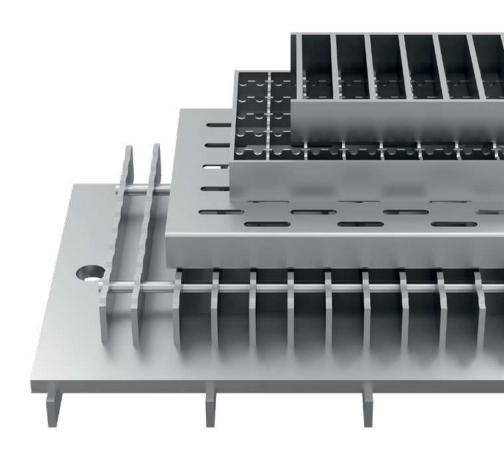

They are used to collect water from the surface of the floor and drain it into the sewage system. Drainages of this type are used in food plants (breweries, dairies, abattoirs) and chemical industry plants.

PRODUCTION TECHNOLOGY

Standard channels are manufactured in a wide range of dimensions and shapes. They are produced according to a drawing prepared as a result of cooperation between an investor, a designer or a technologist and ATT engineers. By standard, we use sheet metal of 2 [mm] thickness made of AISI304 or AISI316 grade steel for production. The drainpipes have built-in bottom slope, which by standard is 1%. There is a possibility to adapt the size of the slope to a specific project. In order to facilitate installation, each channel is equipped with rectifying screws and anchoring elements. They allow correct levelling of the drainpipe and its settling in concrete.

The channels are covered with grating. Depending on the application and load, we offer: 'anti-slip' mesh, ladder, perforated sheet or plate grating. As a standard, the sections longer than 4 metres are joined by means of flanges with gaskets. Depending on customer preferences, the standard channels can be connected with other drainage components, such as floor drains or slot channels.



ADVANTAGES OF THE CHANNELS

- drain large amounts of water,
- they may be easily configured and connected at required angles with other standard or slot channels,
- it is possible to apply various types of covering gratings,
- easy access for cleaning (rounded internal corners, removable gratings, waste basket with a trap),
- the channel edge can be adapted to the floor type (additional edge flanging for tiles, angle for expansion joints),
- a rodding eye is installed in the sewage system in the place of drainage.

DESIGN DESIGNATIONS

Standard channels are defined by determining the external width (S150, S200, S220......S600...... etc.).

EXAMPLE

S150 - means a channel of external width of 150 [mm].

In case of a S150 channel, the grating width will be 110 [mm], and the hydraulic width will be Sh = 80 [mm]. In addition to the width, the channel parameters should also include type and degree of fall and the drawing of the channel route in the plan.

COVERING GRATINGS

The most typical grating to cover the standard channels is anti-slip mesh grating with 23×23 [mm] mesh size and the load-bearing angle 25×2 or 30×2 [mm] Our product range also includes the ladder, plate or perforated sheet gratings, all in different sizes and dimensions.


The gratings are selected depending on the place of installation of the channel, taking into account the load class and functionality.


In the places of intensive forklift traffic, it is recommended to install a plate grating, while in case of large amounts of drained water - a mesh grating.

CHANNEL EDGES FINISHING

The edge finishing should depend on the flooring and wastewater temperature. We can offer the following options:

- 1 with downward flange (standard),
- 2 with flange,
- 3 with raised back edge,
- 4 with edge angle section for the expansion joint in the floor,
- 5 with tightly plately folded edges,
- 6 for a vinyl floor.

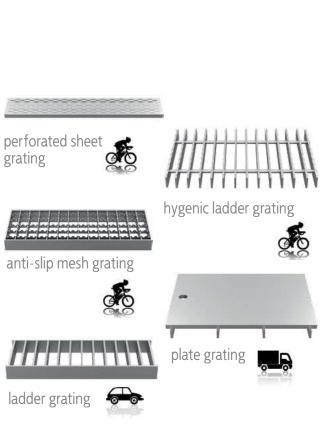

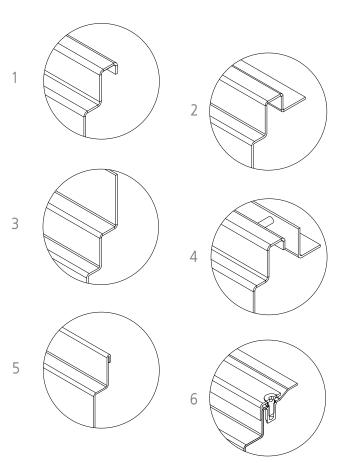


The following figure presents an example channel arrangement. The distribution of drains and the arrangement of the channel, depends on the needs and the amount of water collected on the floor during the technological process. There is a possibility to connect the systems we have on offer – standard and slot channels.

Arrangement of the channel should be prepared by a designer in cooperation with a technologist. In case of any technical doubts related to execution of a given

drainage, our consultants can assist you.

The outlet of the channel is equipped with a trap and a waste basket, which secure the sewage system against solid contamination. The drainage part is also equipped with a flange, which can be supplemented with a horizontal insulation.

Such a solution ensures ttightness at the point where the outlet passes through the ceiling.

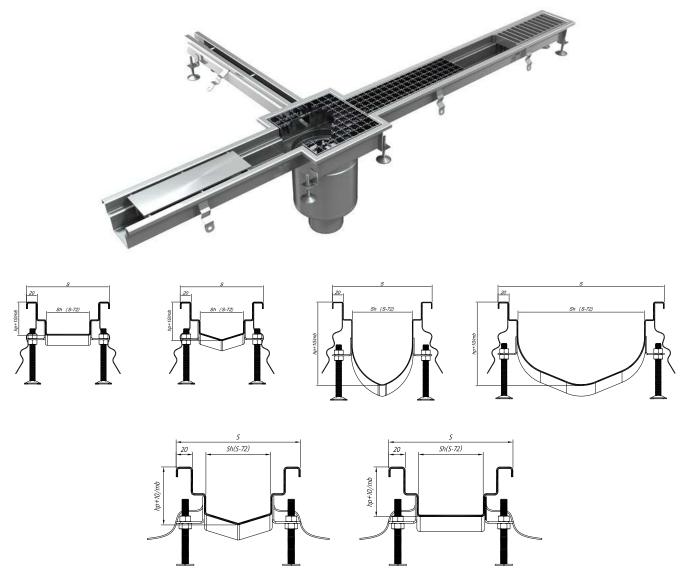

hp. – the initial height of the channel, the slope of the channel bottom depends on the specification requirements and installation possibilities

<section-header>

Outlet diameter

The table below shows the standard dimensions of the channel extension depending on the type of outlet used. The extension is always 10 [mm] deeper than the channel it is conected to. Due to the fact that the grating has bearing elements of one direction only, the extension is asymmetrical, which prevents incorrect installation.

Outlet type	Outlet Diameter diameter of the body [mm] [mm]	Diameter	Dimension of the extension box	Channel without extention box		Fow rate V1.2 [l/s]
		(length X width) [mm]	Minimum channel width [mm]	Minimum hydraulic width [mm]		
Wm150/Wm200/50,75,110V1/2,H1/2	50,75,110	110	205x200	S190	120	0.9
W200/75,110V1/2,H1/2	75, 110	157	245x240	S240	170	2.1
W250/110V1,H1	110	193	275x270	S270	200	3
W250/110V2,H2	110	172	275x270	S250	180	3
W300/110,160V1/2,H1/2	110, 160	255	355x350	S330	260	5.7
W400/200V1,H1	200	348	445x440	S430	360	13.9
W400/200V2,H2	200	320	445x440	S400	330	13.9



vertical floor drain single part



horizontal floor drain single part

V2

vertical floor drain two part

horizontal floor drain two part

SLOT CHANNELS

ADVANTAGES OF THE SLOT CHANNELS

- blend well as a design element,
- less expensive than standard channels,
- they may be connected to other types of channels,
- grating is not required,
- easy assembly in the place of installation.

Slot channels are a simple and inexpensive surface drainage system, used in places where high hydraulic capacity of the channel is not required.

The perfect solution for rooms where condensate drips from machines and air conditioning devices, e.g. in dairies, bakeries and swimming pools, as separation between dry and wet surfaces.

PRODUCTION TECHNOLOGY

Slot channels are made of stainless steel sheets of 1.5-2 [mm] thickness. They have a built-in bottom slope and may be also adapted to a particular floor thickness. Drainage of water from a slot channel may be provided through a spigot or a floor drain with a waste basket and a trap. By standard, the length of a channel with a single outlet should not exceed 10 [m]. Channel sections longer than 4 [m] are connected via sealed flanges or they can also be welded during installation.

SLOT CHANNELS

MINI SLOT CHANNEL

MINI slot channels are made of 1.5 [mm] stainless steel sheets. The channel is not covered with any grating, and it is characterised by increased hydraulic efficiency compared to standard channels. It is characterised by a smaller inlet opening and clearance width. They are used in applications where lower amounts of wastewater are drained.


MAXI SLOT CHANNEL

MAXI slot channels are made of 2 [mm] stainless steel sheets. The channel is not covered with any grating, and it is characterised by increased hydraulic efficiency compared to standard channels. It is characterised by a greater inlet opening and clearance width. It is used wherever it is necessary to drain greater amounts of wastewater and, due to the production process (lack of large solid contamination), there is no need to use a standard channel.


MINI STANDARD CHANNEL

The mini type standard channel combines the advantages of standard and slot channels. This is a channel of small dimensions with a covering grating. Channels of this type are installed wherever small amounts of water must be drained and it is necessary to use a channel with a possibility to install a rodding eye. By standard, stainless steel sheets of 1,5-2 [mm] thickness made of AISI 304 or AISI 316 grade steel are used for production.


The slot channels and mini standard channel are equipped with levelling bolts and anchoring elements. The technology of installation and further operation is the same as with standard channels.



Mini slot channel

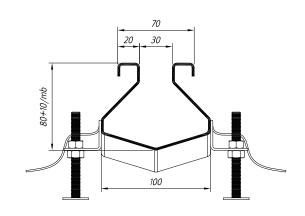


Maxi slot channel

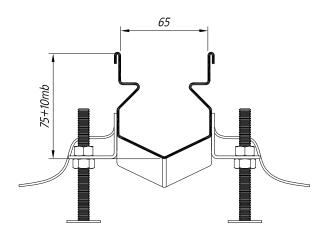

Mini standard channel

LINEAR DRAINAGE

CHANNELS ASSEMBLY DIAGRAM

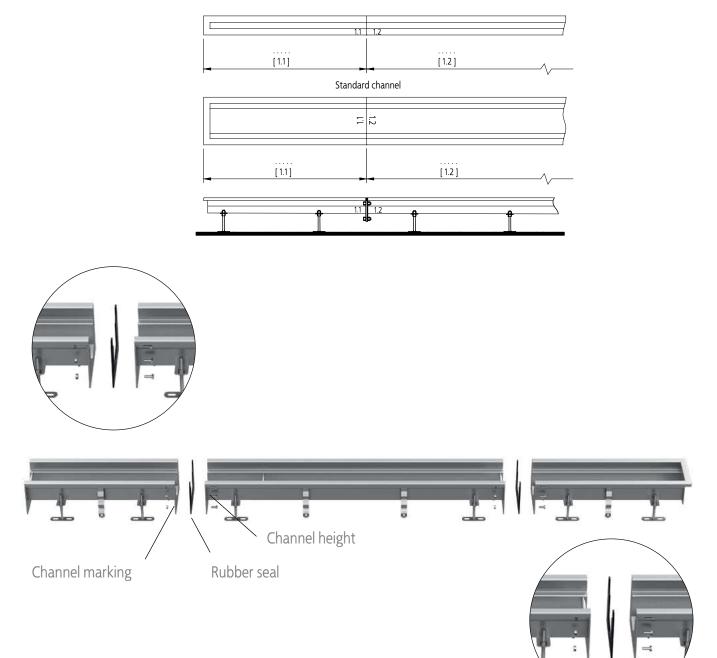

By default, channel lines are divided into 4-metre sections that allow for efficient and safe transport of the product.

A single element channel to a maximum length of 6 metres can be manufactured.

By standard, elements are connected using mounting flanges. This type of connection requires additional space of 25 [mm] under the bottom of the channel in order to ensure tightness between its sections. Alternatively, the drainage system may be welded directly at the construction site.



CHANNELS INSTALLATION

1.Before installing the channel, bolt all of its parts together according to the "installation guide" to ensure tightness of all flange connections (flange-gasketflange).

2. Install the channel prepared as above in the sewer service pipe's spigot.

3. The next step involves placing the channel at the proper height. The channel edge should be 1-1.5 [mm] below the floor level.

4. When the channel is stabilized, we recommend securing it against displacement during concrete pouring.

5. Pour concrete on the levelling legs and anchoring elements.

6. In hard to access areas subjected to highest loads, insert the concrete with a spatula.


7. Make sure the elements are clean and free of dirt. Remove gratings, waste baskets and traps.

DEPTH OF CHANNELS

In case of channels with bottom slope, the channel depth increases along with its length. The depth of the outlet at the drain depends on the initial height, length and specified channel slope.


Initial standard depth of the slot channel is 65 [mm], the bottom slope amounts to 1%, and the opening width is 20 [mm].

These parameters may be customized according to a client's requirements.



LINEAR DRAINAGE

MINIMUM HEIGHTS FOR STANDARD AND SLOT CHANNELS

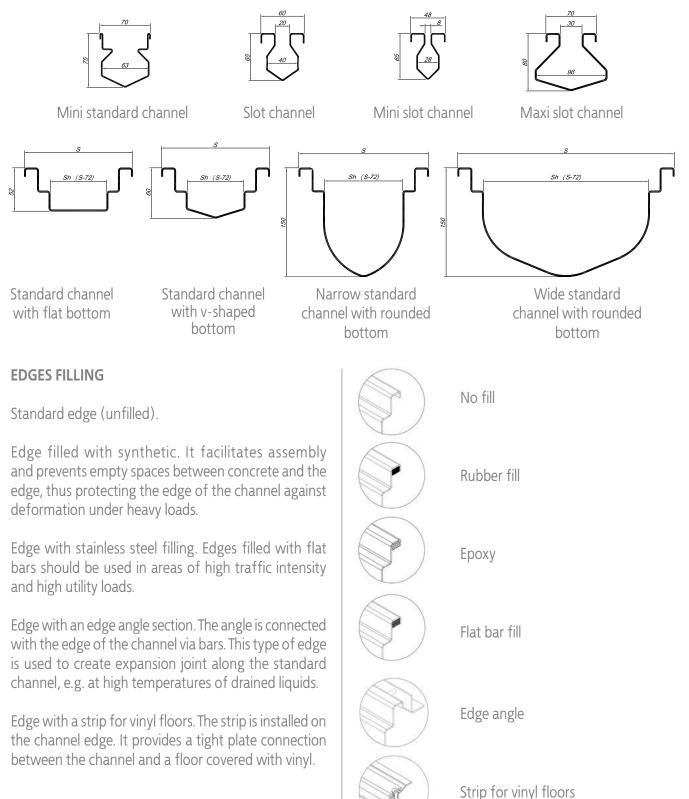


BATHROOM SOLUTIONS



BATHROOM DRAINS

WL100/40 FLOOR DRAINS WITH VERTICAL OUTLET

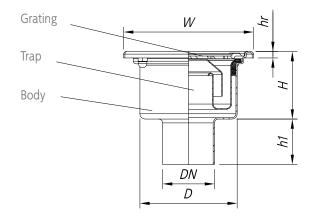

Symbol	WI100/40V1	
Catalogue number mat. 3	00.063040.02 - *	
Dimensions [mm]	DN	40
	Н	57
	H1	-
	h1	35
	D	77
	W	100x100
	hr	1,5


The number of a complete floor drain must be supplemented with the appropriate symbol and/or the grating catalogue no.



ATT INOX ENGINEERING

BATHROOM DRAINS

WL100/32 FLOOR DRAINS WITH HORIZONTAL OUTLET

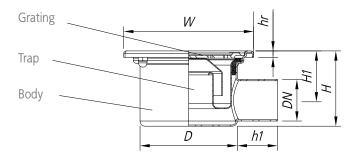

Symbol	WI100/32H1	
Catalogue number mat. 3	00.064032.02-*	
	DN	32
Dimensions [mm]	Н	58
	H1	42
	h1	30
	D	77
	W	100x100
	hr	1,5

The number of a complete floor drain must be supplemented with the appropriate symbol and/or the grating catalogue no.



FIORE cat. no. 02.063040.01




CERCHIO cat. no. 01.063040.01



GOCCIA cat. no. 03.063040.01

ATT INOX ENGINEERING

BATHROOM CHANNELS

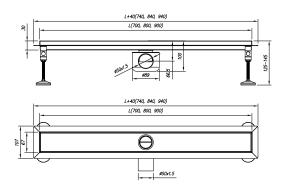



CHANNEL WITH FLANGE FOR TILE FLOORS

channel with flange for tile floo	rs
mat	
length [mm]	Cat. no.
700	00.067007.02
800	00.067008.02
900	00.067009.02
1000*	00.067010.02
1200*	00.067012.02

Gratings					
Name	Length [mm]	Cat. no.			
GOCCIA		02.067007*.03			
VIPERA	Available: 700,800,900	03.067007*.03			
QUADRO	At request: 1000,1200	05.067007*.03			
PIETRA		06.067007*.03			
FAGIOLI	At assess 700,000,000,1000,1000	04.067007*.03			
PIAZZA	At request: 700,800,900,1000,1200	01.067007*.03			


* At request

* digits corresponding to the channel length, e.g.: 02.067007.03 is GOCCIA grating 700 [mm] in length





BATHROOM CHANNELS

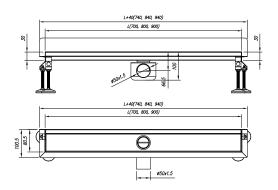



CHANNELS WITH A RAISED BACK EDGE

channel with a raised back edg	e
mat	
length [mm]	Cat. no.
700	00.080007.02
800	00.080008.02
900	00.080009.02
1000*	00.080010.02
1200*	00.080012.02

	Graungs	
Name	Length [mm]	Cat. no.
GOCCIA		02.067007*.03
VIPERA	Available: 700,800,900	03.067007*.03
QUADRO	At request: 1000,1200	05.067007*.03
PIETRA		06.067007*.03
FAGIOLI	At request: 700,800,000,1000,1000	04.067007*.03
PIAZZA	At request: 700,800,900,1000,1200	01.067007*.03

* on request

 \ast digits corresponding to the channel length, e.g.: 02.067007.03 is GOCCIA grating 700 [mm] in length



PIAZZA



VIPERA



FAGIOLI

QUADRO

PIETRA

ATT INOX ENGINEERING

SHOWER BASES

Bathroom shower bases are made of stainless steel with the AISI 304 symbol. They are produced using decorative sheet metal of 1.25 [mm] thickness. Circle-shaped embossing gives the structure the required stiffness and at the same time provides anti-slippery protection. Drainage to the sewage system is carried out via bathroom outlets available on the market.


APPLICATION

- any room for disabled persons in facilities such as health centres, hospitals, rehabilitation facilities, spas, etc.,
- equipment for bathrooms in apartments, sport facilities, production facilities.


ADVANTAGES


- easy cleaning,
- strong disinfectants can be applied,
- anti-bacterial features of stainless steel,
- comfortable entrance to the shower cabin on a wheelchair without risk of damaging the structure or encountering any obstacles,
- easy assembly,
- aesthetically pleasing appearance.


Catalogue number	dimensions [mm]	height [mm]
00.208008.07	800 x 800	40
00.209009.07	900 x 900	40

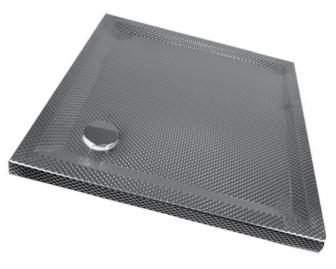

STAINLESS STEEL SHOWER BASE

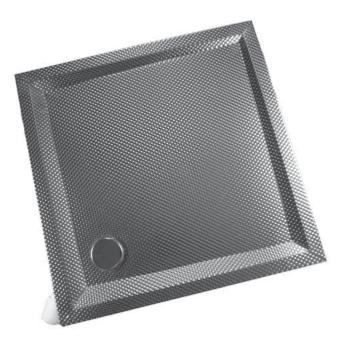

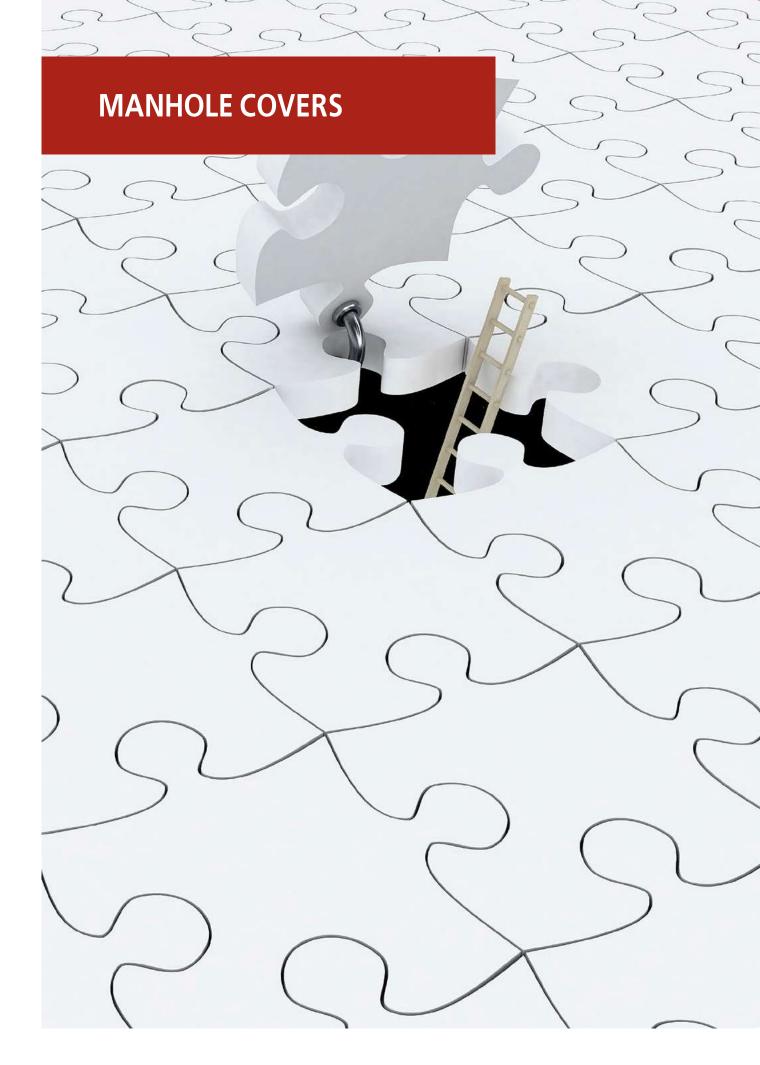

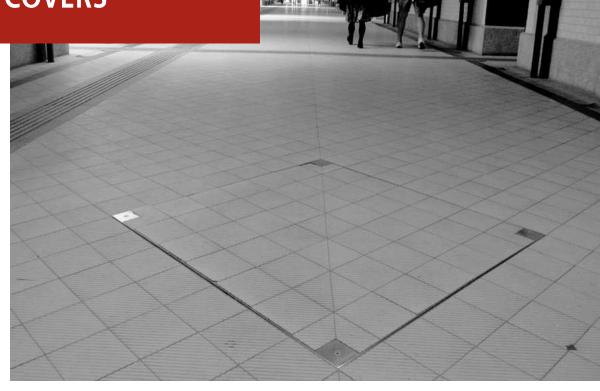

Manhole covers are available in various options and sizes. They are widely used in industrial and public facilities, i.e. in shops, exhibition halls, restaurants, workshops, warehouses, and other places where access to underfloor installations is required.

Floor tiles, terracotta or other materials can be used as finishing material of the upper part of a manhole covers.

Manhole covers are made of 3 [mm] thick stainless steel sheet of AISI 304 or AISI 316. This material allows applying products in places with strict hygenic requirements.


Manhole covers consist of upper and lower parts bolted to ensure safe closure. The product reinforcement is made of "black steel." An O-ring seal between the lower and upper parts is applied.

ADVANTAGES OF MANHOLE COVERS


- easy access to underfloor installations,
- isolation against odours,
- waterproof,
- simple opening system,
- high durability,
- aesthetically appealing.



DIMENSIONS OF GAS-TIGHT MANHOLE COVERS

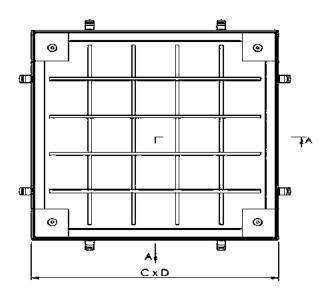

Class	Туре	A x B [mm]	C x D [mm]	H [[mm]
	K3x3	300x300	440x440	70
	K4x4	400x400	560x560	85
	K5x5	500x500	660x660	85
B125	Кбхб	600x600	760x760	85
8125	K7x7	700x700	880x880	100
	K8x8	800x800	980x980	100
	K9x9	900x900	1080x1080	100
	K10x10	1000x1000	1180x1180	100

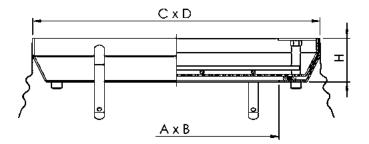


The set includes: 2x round handle




Option: checker plate



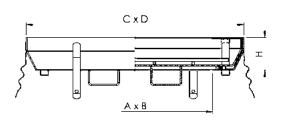

Class	Туре	A x B [mm]	C x D [mm]	H [[mm]
	K3x3	300x300	440x440	70
	K4x4	400x400	560x560	85
	K5x5	500x500	660x660	85
C250	K6x6	600x600	760x760	85
C250	K7x7	700x700	880x880	100
	K8x8	800x800	980x980	100
	K9x9	900x900	1080x1080	100
	K10x10	1000x1000	1180x1180	100

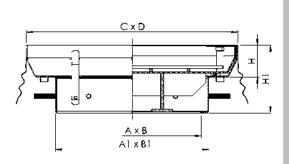

Class	Туре	A x B [mm]	A1 x B1 [mm]	C x D [mm]	H [[mm]	H1 [mm]
	K3x3	266x266	306x306	440x440	70	165
	K4x4	366x366	406x406	560x560	85	180
	K5x5	466x466	506x506	660x660	85	180
D400	K6x6	566x566	606x606	760x760	85	180
D400	K7x7	666x666	706x706	880x880	100	195
	K8x8	766x766	806x806	980x980	100	195
	K9x9	866x866	906x906	1080x1080	100	195
	K10x10	966x966	1006x1006	1180x1180	100	195

OPTION: GAS-TIGHT MODULAR MANHOLE COVER





ATT offers design and production of bespoke gas-tight single and modular manhole covers.

MANHOLE COVERS OPTIONS



DIMENSIONS OF GAS-TIGHT MANHOLE COVERS WITH GAS LIFTERS

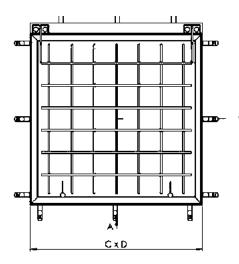

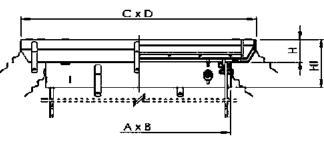

The set includes: 2 x handle





Option: checker plate



Class	Туре	A x B [mm]	C x D [mm]	H [[mm]	H1 [mm]
	Кбхб	600x600	770x770	100	200
	K7x7	700x700	870x870	100	200
B125	K8x8	800x800	970x970	100	200
	K9x9	900x900	1070x1070	100	200
	K10x10	1000x1000	1170x1170	100	200

Class	Туре	A x B [mm]	C x D [mm]	H [[mm]	H1[mm]
	Кбхб	600x600	770x770	100	200
	K7x7	700x700	870x870	100	200
C250	K8x8	800x800	970x970	100	200
	K9x9	900x900	1070x1070	100	200
	K10x10	1000x1000	1170x1170	100	200
D400	Кбхб	600x600	770x770	100	200
	K7x7	700x700	870x870	100	200
	K8x8	800x800	970x970	100	200
	K9x9	900x900	1070x1070	100	200
	K10x10	1000x1000	1170x1170	100	200

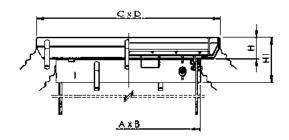

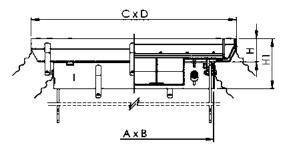

ROUND MANHOLE COVERS

ATT's range of products is complemented by round manhole covers. They are manufactured in two versions: for filling or with a stainless checker plate. The engineering department adapts the dimensions and structures result-ing from the expected load class as per individual specifications of the client.





with protective grid

with a ventilation cup

Ľ

with insulation


with gas lifters (the number of pieces depends on the size of the access cover)

		··	
Туре	A x B [mm]	C x D [mm]	E x F [mm]
WB-14x4	400 x 400	470 x 470	543 x 543
WB-15x5	500 x 500	570 x 570	643 x 643
WB-16x6	600 x 600	670 x 670	743 x 743
WB-17x7	700 x 700	770 x 770	843 x 843
WB-18x8	800 x 800	870 x 870	943 x 943
WB-19x9	900 x 900	970 x 970	1043 x 1043
WB-1 10x10	1000 x 1000	1070 x 1070	1143 x 1143

ALUMINIUM MANHOLE COVERS

Aluminium manhole covers are used in industrial and public facilities: in shops, exhibition halls, restaurants, workshops, and warehouses, wherever access to underfloor installations is required. Floor tiles, terracotta or other materials can be used as finishing material of the upper part of a manhole cover. Products are available in various options and sizes. These elements provide a barrier against oudours and liquids. Three series are available: KA-light, KA-heavy and KAextra heavy.



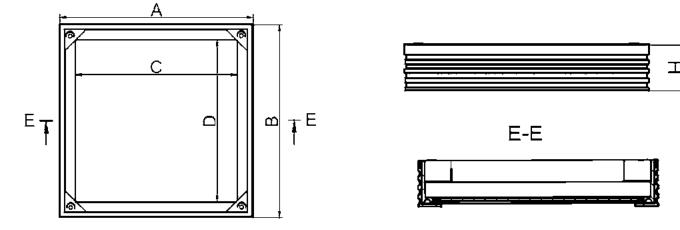

KA-Light series – **manhole covers equipped** with two seals: one in the bottom and T-seal * in the frame. Four heights are available: 40 [mm], 60 [mm], 80 [mm], 100 [mm].

Serial number	External dimension AxB [mm]	Internal dimension CxD [mm]	Height H [mm]	Load [Kn]
KA-40/60/80/100L- 3x3	300x300	240x240	40/60/80/100	40
KA-40/60/80/100L- 4x4	400x400	340x340	40/60/80/100	40
KA-40/60/80/100L-5x5	500x500	440x440	40/60/80/100	40
KA-40/60/80/100L-6x6	600x600	540x540	40/60/80/100	40
KA-40/60/80/100L-7x7	700x700	640x640	40/60/80/100	20
KA-40/60/80/100L- 8x8	800x800	740x740	40/60/80/100	20
KA-40/60/80/100L- 9x9	900x900	840x840	40/60/80/100	20
KA-40/60/80/100L-10x10	1000x1000	940x940	40/60/80/100	20

ALUMINIUM MANHOLE COVERS

KA-Heavy series – **manhole covers equipped** with three seals: two in the bottom and a T-seal * in the frame. Four heights are available: 40 [mm], 60 [mm], 80 [mm], 100 [mm].

Serial number	External dimension AxB [mm]	Internal dimension CxD [mm]	Height H [mm]	Load [Kn]
KA-40/60/80/100H- 3x3	300x300	210x210	40/60/80/100	60
KA-40/60/80/100H- 4x4	400x400	310x310	40/60/80/100	60
KA-40/60/80/100H- 5x5	500x500	410x410	40/60/80/100	60
KA-40/60/80/100H- 6x6	600x600	510x510	40/60/80/100	60
KA-40/60/80/100H- 7x7	700x700	610x610	40/60/80/100	40
KA-40/60/80/100H- 8x8	800x800	710x710	40/60/80/100	40
KA-40/60/80/100H- 9x9	900x900	810x810	40/60/80/100	40
KA-40/60/80/100H- 10x10	1000x1000	910x910	40/60/80/100	40

KA- Extra Heavy series – **manhole covers equipped with a double system,** including three seals: two in the bottom and a T-seal * in the frame. Two heights are available: 80 [mm] are 100 [mm]. Load class: 125 Kn.

Serial number	External dimension AxB [mm]	Internal dimension CxD [mm]	Height H [mm]	Load [Kn]
KA-80/100EH- 3x3	300x300	210x210	80/100	125
KA-80/100EH - 4x4	400x400	310x310	80/100	125
KA-80/100EH- 5x5	500x500	410x410	80/100	125
KA-80/100EH- 6x6	600x600	510x510	80/100	125
KA-80/100EH- 7x7	700x700	610x610	80/100	125
KA-80/100EH- 8x8	800x800	710x710	80/100	125
KA-80/100EH- 9x9	900x900	810x810	80/100	125
KA-80/100EH-10x10	1000x1000	910x910	80/100	125

To provide appropriate efficiency of manhole covers, please follow the guidelines below during the installation process:

1. During installation, the upper part and the lower part of the manhole cover must be closed.

2. In order to avoid deformation of the frame, which would cause problems during further use of the manhole cover, place spacers between the edges of the upper and lower parts. 3. It is necessary to correctly level and set the manhole cover in the previously prepared well.

4. The manhole cover must be stabilised using concrete of malleable consistency.

5. The upper part of the manhole cover, including the reinforcement, must be filled with concrete of B30 class or higher, depending on the product's dimensions and the load class.

6. Concrete is poured up to the height that allows for later installation of the floor.

MEDIA BOXES

Media boxes are used wherever it is necessary to access the telephone lines and electrical sockets in a floor. The may be used in public facilities, markets, industrial halls, warehouses, as well as wherever commercial stands are periodically opened or it is necessary to connect a specific device.

Boxes are made of AISI 304 and AISI 316 stainless steel. The body is made of sheet metal of 2 [mm] thickness, while the cover with a lid is made of sheet metal of 5 [mm] thickness. All elements are welded using argon shield, and then etched and protected against corrosion. The box is equipped with a satin cover with a seal installed using screws, as well as a tilting lid. It ensures easy access to the interior of the box without the necessity to remove the cover. The lid closing system secures the box against unauthorised opening.





SK1

ATT offers SK1 single-chamber, SK2 double-chamber boxes, as well as multi-chamber boxes upon a client's individual request.

NOTE!


Dimensions provided in the table may be customized. customized.

type	catalogue number	outside dimension A x B [mm]	inside dimension C x D [mm]	height H [mm]
SK-1	00.090001.04	168x300	114x242	70
SK-2	00.090002.04	300x300	242x242	70

PROTECTIVE ELEMENTS



BOLLARDS AND BARRIERS

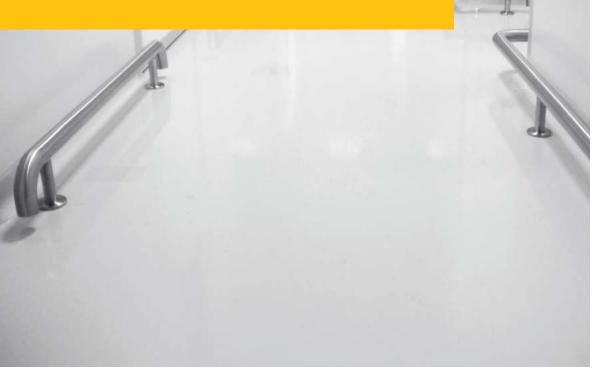


Protective elements are used e.g. in food industry plants (breweries, dairies, abattoirs), in catering facilities, and hospitals. The shape, diameter of pipes, height of buffers and mechanical resistance parameters are designed in accordance with the individual expectations of a client.

By standard, 1.5 to 3 [mm] thick pipes are used. We offer surfaces with 2B finish or brushed. There are 2 types of buffer installation: 1) in holes in the floor which are filled with concrete; 2) by chemical or expansion anchors, that attach the flange of the buffer to the floor. The complete unit constitutes a durable and hygienic element that provides protection for walls, sliding doors and other objects, and enables effective cleaning of the ptotected area. Non-corrosive stainless steel is a significant advantage for bollards and bariers in the event of mechanical damage. Upon impact, the product is only deformed, and it retains its hygienic characteristics.





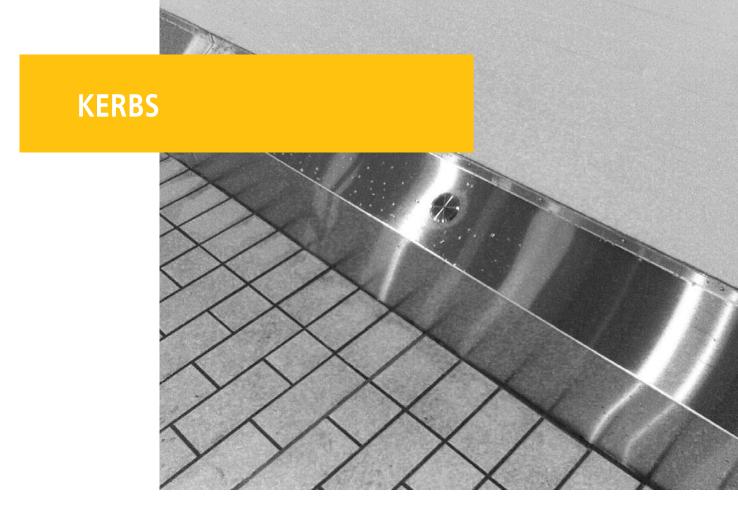

STAINLESS STEEL KERBS

Food production, chemical, and pharmaceutical plants require adherence to particularly strict hygiene requirements. These include covering contact places between a floor and a wall, as well as walls and a ceiling, where dirt and moisture may accumulate, thus creating conditions contributing to the growth of bacteria.

Stainless steel kerbs are an excellent and functional solution to avoid the problem of bacterial contamination and dirt accummulation. The product is designed to fit to wall panels as well as concrete structures to effectively protect these surfaces. ATT's product line of kerbs is supplemented by finishing elements such as internal and external corners. At the connection between kerbs and the floor, appropriate sealing substances, resistant to strong disinfecting agents and high temperatures, are used.

The product range includes both kerbs that tightly adhere to the panels, and those filled with concrete, and then closed with special covers.





STAINLESS BUFFERING TILES



Stainless buffering tiles offered by ATT are made of 2 [mm] thick sheet metal. They feature high degree of resistance to devastation and damage, and withstand virtually every load occurring in industry and transport.


Due to the strict hygienic requirements imposed by e.g. food processing industry standards, ATT offers stainless steel products characterized by anti-corrosion, hygienic finishing, and durability.


APPLICATION

- heavy industry plants,
- food industry plants,
- production halls,
- warehouses, stacking yards,
- printing houses,
- unloading ramps,
- foundries, ironworks.

ADVANTAGES

- resistance to high load classes,
- durability,
- safety,
- renovation of the floor is not required,
- technical support during the entire process of implementation of an order,
- installation service.

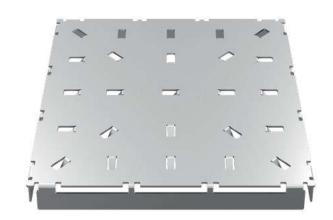


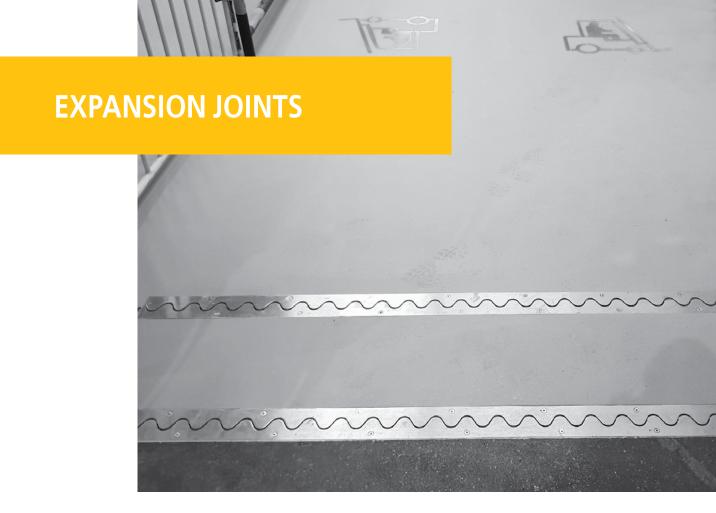



EXPANTION JOINTS

In order to prevent cracks in floors made over larger surfaces, expansion joint cuts are applied during floor application. A stainless steel expansion joint is a structural element buffering surface movements. It also protects gaps against accumulation of any kind of contamination.

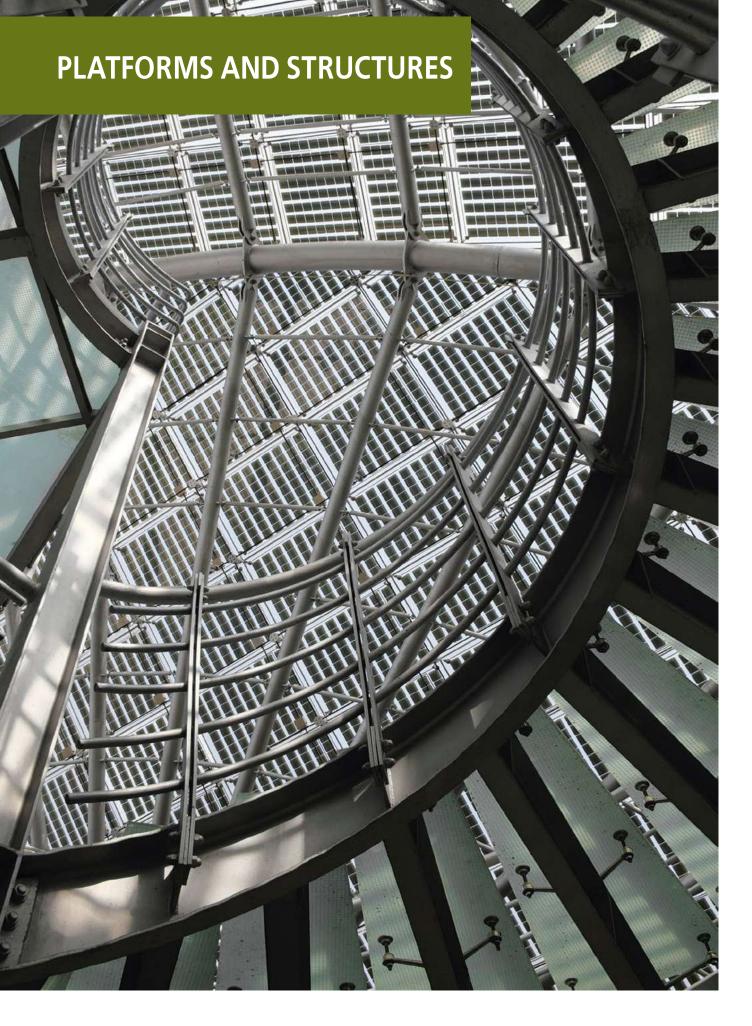



Technological platforms are elements of engineering structures that ensure safe access to a given industrial zone. Platforms are applied to eliminate hazards and ensure the safety of employees working at heights. Due to the customized shape of each platform, these constructions allow employees easy and safe access to specific working areas.

All platform structures are designed and manufactured in accordance with the following standards:

1. Safety of machinery – Permanent means of access to machinery – Part 1:Choice of fixed means of access between two levels: **PN-EN ISO 14122-1:2016-08.**

2. Safety of machinery – Permanent means of access to machinery – Part 2: Working platforms and walk-ways **PN-EN ISO 14122-2:2016-08.**

3. Safety of machinery – Permanent means of access to machinery – Part 3: Stairs, stepladders and railings:

PN-EN ISO 14122-3:2016-08.

4. Safety of machinery – Permanent means of access to machinery – Part 4: Fixed ladders

PN-EN ISO 14122-4:2016-08.

5. PN-EN 1090-1:2012 Part 1:

Rules of compliance assessment for constructional components

PN-EN 1090-2:2012 Part 2:

Technical requirements for steel structures

PLATFORMS AND STRUCTURES



Prefabrication and installation of:


- technological platforms and production lines,
- technological platforms supporting technical walkways that allow for operation of machines and devices,
- walkways connecting technical objects,
- platforms and industrial stairs,
- railings.



RAILINGS AND HANDRAILS



Elements made of stainless steel may be applied both outside and inside buildings. Due to the high hygienic parameters of the material and the finishing technology, constructions may be installed in e.g. food processing plants or the pharmaceutical industry. Their aesthetic appearance (satin or gloss finish) makes stainless steel railings popular as an architectonic element of buildings.

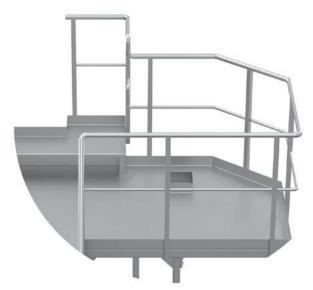



ATT INOX ENGINEERING

PLATFORM GRATINGS AND STEPS

Gratings and steps manufactured by ATT are widely used as elements of platforms, landings, internal and external staircases, footbridges, for protection of manhole covers, access ramps for the disabled, on communication routes near pipelines and tanks, etc.




PLATFORM GRATINGS AND STEPS

These products are used in any construction projects, regardless of an industry, improving safety and work comfort, as well as blending into interior design and the architecture of the surrounding environment. Stainless steel products meet high durability standards, are resistant to adverse environmental impacts, are maintenance-free, and guarantee stability of the structure and work safety. The perception of stability is a highly significant factor from a psychological point of view, in particular in case of users of platforms and landings built at great heights.

WE OFFER TWO TYPES OF PLATFORM GRATINGS

Smooth gratings – transverse flat bars are tightly settled into load-carrying flat bars, and then welded into an edge frame made of a 3 [mm] thick flat bar. **Serrated gratings** – are characterized by an increased friction coefficient due to cuts on load-bearing and transverse flat bars, thus increasing their anti-slippery properties. Cut gratings are applied to create platforms in places where there is a risk associated with snow, ice, lubricants and moisture.

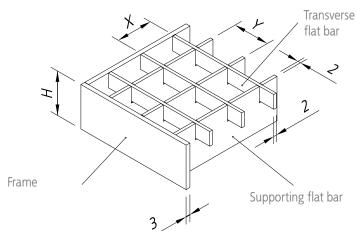

SMOOTH GRATING

height H [mm]	dimension X [mm]	dimension Y [mm]
20/25/30/40	12.5	25
20/25/30/40	25	25
20/25/30/40	33	33






DESCRIPTIONS


Load-bearing flat bars – bear the load of the grating and are positioned vertically, at the same time maintaining equal spacing.

Transverse flat bars – they connect all load-bearing flat bars through their tight settling in gaps and welding. **Grating mesh dimension** – it is a gap between axes of adjacent load-bearing and transverse flat bars.

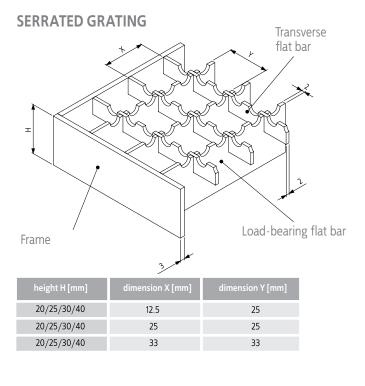




PLATFORM GRATINGS AND STEPS

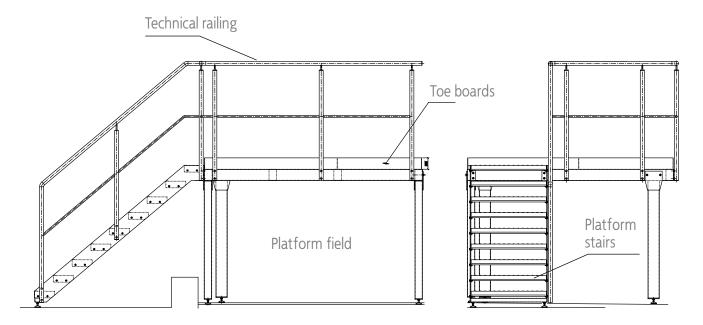

STAIR STEPS DIMENSIONS

[mm]

L		600			800			900			1000			1200	
В	240	270	305	240	270	305	240	270	305	240	270	305	240	270	305
h						S	upporting fl	at bars dime	ensions						
n	120	150	180	120	150	180	120	150	180	120	150	180	120	150	180

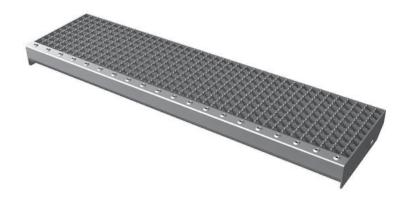

STAIR STEPS

A stair step is made based on a platform grating and is equipped with an additional special side frame which allows for quick and easy installation to the supporting structure.

Stairs are used as entrances to basements, attics, and car repair pits, in warehouses etc.

By standard, we manufacture stairs of the following

lengths: 600, 800, 900, 1000 and 1200 [mm]. Customized dimensions are available.

LEGEND:

- L load-bearing length
- B step width
- h step height
- n spacing of openings in stringer sheets

FOOD INDUSTRY FACILITIES EQUIPMENT

TRANSPORT TROLLEYS

We offer a wide selection of transport trolleys intended for food industry facilities: transport trolleys, "Z" and "H" type smoking trolleys, stuffing trolleys, smoked meat cooling tanks, ice defrosting trolleys, meat tubs, meat wheelbarrows, transport counters, gastronomic counters and others.

Below, we present only selected products, for more information visit **www.att.eu**.

EURO CONTAINERS TRANSPORT TROLLEYS				
Catalogue number	Description	Dimensions [mm]		
00.640004.01	wheel type - plastic	410 x 655		
00.640004.02	wheel type – rubber	410 x 655		

The product offer also includes: transport trolleys with a handle, trolleys for transport trolleys, and handles for transport trolleys.



STUFFING TROLLEYS

Catalogue number	Description	Dimensions [mm]
00.650012.01	capacity 120 l	580x580x595
00.650020.01	capacity 200 l	680x690x700
00.650030.01	capacity 300 l	680x690x950
00.650020.02	capacity 200 l with perforation	680x690x950
00.650020.03	capacity 200 l with a drip tray	680x690x950
00.650030.02	capacity 300 l with a drip tray	680x690x950

Trolleys of the following capacities: 1201, 2001, and 3001. Option: polished finish.

"H" TYPE SMOKING TROLLEYS

Catalogue number	Options	Dimensions [mm]
00.647010.01	6 shelves, for a stick of 1000 [mm] length	1021 x 985 x 1970
00.647010.02	6 shelves, for a stick of 1000 [mm] length and trays 920 x 948 [mm]	1021 x 985 x 1970

Smoking trolleys of "Z" and "H" types are available in two versions: for trays or for sticks. The range includes sticks of the "star" type.





HYGIENE ELEMENTS

The wide selection of hygiene products includes various types of washbasins, shoe washers, hygiene passages, disinfection stations, knife, saws and cleaver sterilisers, driers for shoes and aprons, disinfection agents dispensers, soaps, headgear, and paper towels. Below, we present only selected products, for more information visit **www.att.eu**.

HYGIENE STATION

Catalogue number	Dimensions [mm]
00.701024.01 + version options	2400 x 1000 x 1663

Equipped with the following elements:

- 1- and 2-way sanitary sluices,
- driers and hand-drying modules,
- transitive bath for shoe soles cleaning,
- brushes for shoe cleaning ("entrance" and "exit" modules)
- sensors detecting low level of cleaning agents,
- released turnstile for hands disinfection,
- function of emergency lowering of the turnstile arms,
- personalised solutions in accordance with the client's requirements.





Catalogue number	Туре	Dimensions [mm]	Dimensions [mm]
00.718020.01	up to 8-10 knifes 1000 W	150 x 125 x 260	250 x 205 x 525
00.718037.01	up to 20 knifes 3000 W	345 x 120 x 265	525 x 230 x 445

We recommend knife, saw and cleaver sterilisers. We also offer inserts for sterilisers, shelves for inserts, and UV sterilisers.



HYGIENE ELEMENTS

HYGIENE PANEL

Catalogue number	Dimensions [mm]	Options
00.608009.01	950 x 950	activated via a photocell
00.608009.02	950 x 950	knee activation
00.608009.03	950 x 950	with a steriliser

The hygiene panel is equipped with the following elements:

- washbasin with a knee or sensor switch,
- soap and disinfecting agent dispenser,
- paper towel container,
- bin for used towels,
- wall protection against splashing.



WASHBASIN DRAINPIPE

Catalogue number	number of stations	Dimensions [mm]
00.606013.01	2	1300 x 500 x 710
00.606019.01	3	1900 x 500 x 710
00.606025.01	4	2500 x 500 x 710

Moreover, we recommend soap, disinfecting agents and paper towel dispensers, as well as bins for used towels, for our multi-station washbasins.



MANUAL WASHERS FOR SHOES



We offer a wide variety of manual and mechanical washers for shoes and soles, equipped with triggering and deactivating sensors, with height adjustment capabilities, etc., depending on individual needs.



FURNITURE

Furniture is made of stainless steel and meets the strictest sanitary requirements, making it an optimal solution in facilities in the food, chemical, pharmaceutical, gastronomic and other industries.

The basic product range is as follows:

- work tables (butchering, auxiliary, packing, with a rim and a drain, with drawers),
- table and cabinet units (with tilting door, with drawers),
- cabinets (standard, for storage of materials)
- tables (stationary, mobile)

The expanded product range includes e.g.:

- pallets,
- box pallets,
- transport counters,
- meat tubs,
- containers,
- custom elements upon special request or according to the individual design of a client.

We offer professional consulting in order to select the optimal solution. There is also the possibility to modify customize products (dimensions, finishing or structural reinforcement).





STANDARD CABINETS

Catalogue number	width [mm]	depth [mm]	height [mm]
00.300018.03	800	600	1800
00.300021.03	800	600	2100
00.301018.03	1000	600	1800
00.301021.03	1000	600	2100

MATERIAL CABINETS

Catalogue number	width [mm]	depth [mm]	height [mm]
00.305018.03	800	600	1800
00.305021.03	800	600	2100
00.306018.03	1000	600	1800
00.306021.03	1000	600	2100

NOTE! There is a possibility to modify dimensions provided in the table.

FURNITURE

BUTCHERING TABLES

Catalogue number	width [mm]	depth [mm]	height [mm]
00.310006.03	600	500	850
00.310007.03	700	600	850
00.310008.03	800	600	850
00.310009.03	900	600	850

TABLES WITH SINKS

Catalogue number	width [mm]	depth [mm]	height [mm]
00.315014.03	1400	700	850
00.315016.03	1600	700	850
00.315018.03	1800	700	850
00.315020.03	2000	700	850
00.315022.03	2200	700	850

TABLE AND CABINET UNITS WITH TILTING DOORS

Catalogue number	width [mm]	depth [mm]	height [mm]
00.320012.03	1200	700	850
00.320014.03	1400	700	850
00.320016.03	1600	700	850
00.320018.03	1800	700	850
00.320020.03	2000	700	850

TABLE AND CABINET UNITS (WITH DRAWERS)

Catalogue number	width [mm]	depth [mm]	height [mm]
00.325012.03	1200	600	850
00.325016.03	1600	600	850
00.325020.03	2000	600	850
00.326012.03	1200	700	850
00.326016.03	1600	700	850
00.326020.03	2000	700	850

NOTE! The dimensions in the above tables can be modified for custom orders.



NOTES

NOTES

NOTES



Please note that ATT is continuously developing its portfolio of products in order to implement technology upgrades and meet legal requirements. The company thus reserves the right to modify products at any time, without changing their general characteristics.

Any offer presented in the catalogue is not an offer within the meaning of the Civil Code.

ATT Sp. z o. o. ul. Albatrosów 16C, 30-716 Kraków tel. +48 12 290 29 30 fax +48 12 290 29 31 e-mail: att@att.eu www.att.eu



ATT Sp. z o.o.

ul. Albatrosów 16c, 30-716 Kraków, Poland tel: +48 12 290 29 30 fax: +48 12 290 29 31 e-mail: att@att.eu www.att.eu

